



**ROCKFORD BOARD OF EDUCATION
INVITATION FOR BID ON SUPPLIES, MATERIALS, EQUIPMENT OR SERVICES
FOR SCHOOL DISTRICT NO. 205
ROCKFORD, ILLINOIS**

IFB No. **26-27 Carlson ES Walls/Doors/Student Support**

DATE: **March 10, 2026**

RE: **ADDENDUM NO. 1**

To All Bidders:

Included are modifications, clarifications and/or corrections for the Project Manual and are hereby made a part of the contract documents. Please attach this addendum to the Project Manual(s) in your possession. Please note the receipt of this addendum on the bid form. Bidders shall review changes to all portions of this work as changes to one portion may affect the work of another.

If you plan to hand deliver your IFB submission on the due date, please note you must check in on the 1st floor prior to coming to the bid opening. Please allow time for this as late submission will not be accepted.

Refer all questions relative to the business aspect, Instructions to Bidders, Special Conditions, and questions concerning the technical aspect of the documents to the Director of Purchasing by email at purchasingdeptstaff@rps205.com.

ROCKFORD BOARD OF EDUCATION

By: Casey Ramas
Director of Purchasing

LARSON & DARBY GROUP

4949 Harrison Avenue, Suite 100
815/484-0739

ARCHITECTURE-ENGINEERING-INTERIORS

Rockford, IL 61108
FAX 815.229.9867

TO: ALL BIDDERS

RE: ADDENDUM #1

Changes to Issue for Bid Documents Dated February 19th, 2026

PROJECT: RPS Project 2602 Carlson Elementary School Additions & Renovations

PROJECT NO.: IFB: 26-27; RPS: 2602; LDG: 2025-166

DATE: March 10th, 2026

Please attach this Addendum to the Project Manual and Drawings for the referenced project. Take the changes to the Project Manual and Drawings into consideration in preparing your Bid.

Bidders shall make note in writing on Bid Form that this Addendum has been taken into consideration. Failure to do so may be sufficient cause to reject the Bid.

LARSON & DARBY GROUP

By 
Andrew A. Macklin ,AIA

This Addendum consists of [2] page(s), plus materials itemized herein.

I. PRE-BID CONFERENCE

- A. Minutes of the Pre-Bid Conference dated 03/05/2026 are issued herewith.
- B. Pre-Bid Conference Attendance Record, two (2) pages, is issued herewith.

II. GENERAL CLARIFICATIONS

- A. Bid Offer Form has been included.
- B. RFI #1
 - a. 'On the finish schedule and details, it points out that there are SSM1 (solid surface) for windowsills in room 130 Wellness however, this is not in the specs.'
 - i. SSM1 can be found on the 'Legend-Material' on sheet A2.1.

III. ADDITIONS OR CHANGES TO THE PROJECT MANUAL

SECTION 08 71 00 – FINISH HARDWARE

- A. Page 08 71 00-10:
 - a. Hardware set 32 EXD has been updated to include door 126.1.1 and other revisions.
- B. Page 08 71 00-11:
 - a. Hardware set 40 UTY has been revised.

IV. ADDITIONS OR CHANGES TO THE DRAWINGS:

DRAWING G0.3 – Code Summary:

- A. Exterior door 126.1.1 and storefront 126.A have been added to the project.

DRAWING A0.1 – 1st Floor Plan - Demolition:

- A. The exterior door pair, hardware, and frame at 'I' Corridor will be removed. The remaining masonry opening should be patched and repaired to receive new construction.

DRAWING A1.1 – 1st Floor Plan:

- B. Exterior door 126.1.1 and storefront 126.A have been added to the project.

DRAWING A1.2 – Enlarged Plans:

- A. Exterior door 126.1.1 and storefront 126.A have been added to the project.

DRAWING A2.1 – Finish Schedule & Details:

- A. TR3 – TR7 have been updated on the Material Legend.
- B. Johnsonite has been added to the Resource Schedule.

DRAWING A2.2 – Opening Schedules, Types and Details:

- A. Door 119.2 has been updated on the Door Schedule.
- B. Door 126.1.1 has been added to the Door Schedule.
- C. Storefront 126.1.A has been added to the Storefront Schedule
- D. Exterior Storefront Type 2-SF-E13 has been added to the project.

DRAWING E3.0 – Electrical Notes, Symbols, Details & Schedules:

- A. Provide the access control, intrusion detection and camera requirements. Contractor shall coordinate with owner for exact requirements, including model numbers, wiring type, mounting brackets, etc. prior to ordering.
- B. Remove the dimming in toilet room from the lighting control schedule.
- C. Revise the responsibility schedule to state that the EC shall provide all cameras and mounts.
- D. Add a note stating that the contractor shall provide GenSPEED CAT6 and CAT6A plenum-rated cables or approved equal.
- E. Change CAT6A to CAT6 for all cameras.

REISSUED DRAWINGS: The following revised Drawings, which replace previous issues of the Drawings, are issued herewith:

G0.3, A0.1, A1.1, A1.2, A2.1, A2.2, and E3.0

END OF ADDENDUM #1



MEETING MINUTES

CLIENT NAME: RPS Project #2602
Rockford Public Schools
Carlson Elementary School

LOCATION: Carlson Elementary School
4015 Peper Drive
Rockford, IL 61114

PROJECT: RPS Project #2602 - Carlson Elementary School Walls, Doors, & Student Support

PURPOSE: Pre-Bid Meeting

PROJECT# : RPS IFB# 26-27 / LDG 2025-166

CC: See Attendees List Below

DATE: 03-05-2026

ATTENDEES:

Participants	Representing	☒
Scott Jensen	RPS D&C	☒
Dianny Sobojski	RPS D&C	☒
Andrew Macklin	LDG Architect	☒
Nicole Babcock	LDG PM	☒

Participants	Representing	☒
Paidge Ramirez	Sjostrom & Sons	☒
Larry Kuehne	DPI Construction	☒
Justin Federico	Maman Corp	☒
Anthony Welt	Scandroli Construction	☒
Tom Lee	Stenstrom	☒
Todd Byxbe	Miller Eng. Co.	☒
Ross Hearne	L & L Builders	☒
Tom McNamara	L & L Builders	☒

I. Introduction

- a. Dianny made introductions of the RPS and LDG representatives present to the contractors present.

II. Discussion

- a. Dianny read through the Pre-Bid Conference Opening Statement and provided some additional project dates that can be found below in the Project Schedule.
 - i. Review of the location of the Bid Opening on April 2nd, 2026 at 2:00 pm at the Rockford Board of Education, 6th Floor Conference Room.
 1. Late bids will not be accepted.
 2. Faxed or emailed bids will not be accepted.
 - ii. All RFI's need to be submitted in written correspondence during the bid process and MUST be sent to the Director of Purchasing, via email at PurchasingDeptStaff@rps.com.
 - iii. The last RFI will be accepted until March 23, 2026, at 12:00 pm.
 - iv. The last addendum will be issued by March 26, 2026, at 4:30 pm.
 - v. Addenda will be emailed to all attendees at the pre-bid conference, posted on the RPS website, and Bonfire.
 - vi. RPS Board Approval for the project will be April 21st, 2026.
 - vii. May 21st will likely be the last day of school.
 - viii. The contractor can utilize the building's existing utilities for construction purposes.
 - ix. The contractor is responsible for providing a dumpster for the project.
 - x. PMWeb is to be utilized for all construction documentation for this project - submittals, RFIs, change orders, pay applications, closeouts, etc.
 - xi. July 31st is date for substantial completion
 1. Standard work hours will be M-F 6am to 6PM
 2. Overtime available as coordinated upon request.



- xii. Please refer to the required forms checklist for all documents that must be submitted with your bid offer form. All forms must be properly completed, signed and submitted or your bid will be deemed non-responsive.
 - 1. A discrepancy to for the door alternate pricing came forward that RPS and LDG will resolve and an updated bid form will be issued with the 1st Addendum.
- b. Project phasing, see the project schedule below:
 - i. Phase 1
 - 1. Addition 1, Addition 2, existing building renovations, Pod 1 rooms 140-150
 - ii. Phase 2
 - 1. Pod 2 rooms 160-170 and Pod 3 rooms 172-182
- c. Nicole gave a verbal description of the different parts of the project and how the phasing of the project over two years will be completed.
- d. After the verbal description, the attendees toured the school to again discuss the different parts of the project.
 - i. An exterior door was identified that will be included in the project and will be reflected in the documents in Addendum 1.

III. Next Steps or Action Items

- a. See the Project Schedule below for due dates for RFI submittals and bid opening.

IV. Project Schedule

03/23/26	Last RFI Due by 12:00 pm
03/26/26	Final Addendum Issued at 4:30 pm
04/02/26	Bids Opening at 2:00 pm Rockford Board of Education, 6 th Floor Conference Room
04/21/26	RPS School Board Approval
05/21/26	Phase 1 - Commencement of Construction
07/31/26	Phase 1 - Substantial Completion
08/12/26	Phase 1 - Final Completion
05/21/27	Phase 2 - (Tentative) Commencement of Construction
07/30/27	Phase 2 - (Tentative) Substantial Completion
08/11/27	Phase 2 - (Tentative) Final Completion

The schedule above is subject to change.



PRE-BID MEETING SIGN-IN SHEET

IFB No. 26-27 Carlson ES Walls/Doors/Student Support

PLEASE WRITE EMAIL ADDRESS SO THAT IT IS LEGIBLE IN ORDER TO RECEIVE ADDENDUM INFORMATION

	Printed Name	Company Name	Company Address	Telephone	E-mail
1	Scott Jensen <i>SD</i>	RPS	5052 28th Ave. Rockford, IL 61109	815.966.3082	Scott.Jensen@rps205.com
2	Dianny Sieber <i>DTJ</i>	RPS	5052 28th Ave. Rockford, IL 61109	815.490.4152	Dianny.Sieber@rps205.com
3	Andrew A. Macklin <i>AM</i>	Larson & Darby Group	4949 Harrison Avenue, Suite 100 Rockford, IL 61108	815.484.0739	amacklin@larsondarby.com
4	Nicole Babcock <i>NB</i>	Larson & Darby Group	4949 Harrison Avenue, Suite 100 Rockford, IL 61108	815.484.0739	nbabcock@larsondarby.com
5	Raidge Ramirez	Sjostrom & sons	1129 HARRISON AVE.	815 721 1052	pls.073093@gmail.com
6	Larry Kuehne	DPI Const	630 Main St, Rockton, IL	815-378-4244	larry@dpi.construction
7	Justin Federico	Maman Corp	1055 Arthur Avenue	815 782 9886	Justin@maman-corp.com

ROCKFORD PUBLIC SCHOOLS
 IFB No. 26-27 Carlson ES Walls/Doors/Student Support
 Pre-Bid Meeting Sign-In Sheet
 March 5, 2026 at 2:30 p.m.

	Printed Name	Company Name	Company Address	Telephone	E-mail
8	Anthony Welt	Scandoli Construction	1321 Capital Dr. Rockford IL 61107	815-320-5179	estimating@scandoli.com
9	Tom Lee	STENSTROM	2420 20th St Rockford	815-398 2420	TOM L@STENSTROM.COM
10	Todd Byxbe	Miller Eng. Co.	1416 So. Main St Rockford, IL 61102	815-963- 4878	TByxbe@ Mecogroup.com
11	Ross Hearne	L & L Builders	5612 Industrial Ave, Lansing Park, IL	815-204-0614	Estimating@llbuilders.net
12	Tom McNamara	L & L Builders	5612 Industrial Ave	815-633-1773	Estimating@LLbuilders.net
13					
14					
15					
16					
17					
18					
19					

BID OFFER FORM

Bid # 26-27

BID SUBMITTED BY: _____

Date _____

The undersigned, having become familiar with the local conditions affecting cost of work and with the Bidding Documents, including the advertisement of the Invitation for Bid, the Instructions and Supplementary Instructions to Bidders, this Bid Offer Form, the General and Supplementary Conditions, the Drawings and Specifications, and Addenda issued thereto, as prepared and issued by the Board of Education of Rockford School District No. 205, Winnebago and Boone Counties, Illinois hereby agrees to furnish all labor, material and equipment necessary to do the Work required for the project and IFB identified above, for the amount shown below:

BASE BID –Project 2602 Carlson Elementary School Additions & Renovation:

TOTAL: _____ DOLLARS (\$ _____)

ALTERNATE BIDS:

A. Unit Price Breakout – Life Safety Door and Storefront Replacements

The following door and storefront openings are part of this project and need to be included in the Base Bid Total above. The unit costs of these doors and storefronts also need to be broken out and listed in the table below for RPS cost tracking purposes only based on separate Life Safety funding.

Door No.	Unit Price	Door No.	Unit Price
109.1	\$	138.1	\$
109.2	\$	138.2	\$
111.1	\$	147.1.1	\$
111.1.1	\$	167.1.1	\$
113.1	\$	179.1.1	\$
113.1.1	\$		
114.1	\$	Storefront No.	Unit Price
118.1	\$	126.A	\$
119.1	\$	126.1.A	\$
126.1	\$	128.1.A	\$
126.1.1	\$	128.1.B	\$
128.1.1	\$	128.1.C	\$

B. Contractors may submit a voluntary bid to complete the work of both phases 1 and 2 within the timeframe of phase one (completion by July 31st, 2026).

CONTRACTORS VOLUNTARY ALTERNATE BID:

TOTAL: _____ (\$ _____)

ALLOWANCES: Not Applicable

ADDENDA RECEIVED

The undersigned acknowledges receipt of Addenda ____ to ____ inclusive.

BID OFFER FORM

PRE-BID MEETING ATTENDANCE

A Bidder representative attended the Pre-Bid Meeting?

YES ___ OR NO ____.

SITE VISIT

Existing premises and conditions were checked by an on-site inspection on _____.

CONTRACTOR'S QUALIFICATION STATEMENT

A fully completed AIA Document A305-1986 Contractor's Qualification Statement is **required** AND MUST BE SUBMITTED WITH THE BID. Include at least three references from projects completed in the past five (5) years with phone number, date of completion, description of work, and project architect (or engineer) contact name with phone number. Projects must be similar to the scope of this bid, and the bidder must have acted in the capacity of prime or general contractor.

Contractor has adequate equipment to perform the work properly and expeditiously: ___Yes ___No.

COMMENCEMENT AND COMPLETION OF CONTRACT

The undersigned agrees, if awarded the Contract, to commence the contract work within five (5) days of receipt of Order to Proceed or if required, upon execution of a formal written contract and to complete said Work within the specified completion time. The undersigned further agrees to execute the Contract, furnish satisfactory performance and payment bond as well as insurance coverage, as specified in strict accordance with the Contract Documents.

Phase 1 (Addition 1, Addition 2, existing building renovations, and Pod 1 rooms 140-150.2)

Date of Commencement of Construction: May 21, 2026
Date of Substantial Completion: July 31, 2026
Date of Final Completion: August 12, 2026

Phase 2 (Pod 2 rooms 160-170.2 and Pod 3 rooms 172-182.2)

Date of Commencement of Construction: May 21, 2027
Date of Substantial Completion: July 30, 2027
Date of Final Completion: August 11, 2027

BIDDER: _____
(Corporation) (Partnership) (Individual) Circle One

Address _____
Street

City State Zip Code

Phone No. Email address

BIDDER FEIN/SSN NO. _____

By: _____
Bidder or Authorized Agent Signature Print name

Title: _____

Subscribed and sworn to before be this ___ day of _____, _____.

Notary Public
My commission expires: _____

BID OFFER FORM

BID DEPOSIT CERTIFICATION

A Bid Deposit is required in the amount of 5% of the total Bid including Alternate Bids. This Bid Deposit is to be a Bid Bond, Bank Draft or Certified Check made payable to the “Rockford School District No. 205”, as a guarantee that if awarded all or part of the Bid, the firm will enter into a contract to perform with the Board of Education.

Amount of Total Bid \$ _____

Amount of Bank draft or Certified Check \$ _____

BIDDER: _____

Signature of Bidder or Authorized Agent

BID OFFER FORM

SUBCONTRACTOR LISTING

1. Pursuant to bidding requirements for the Work:
The Bidder, for portions of the Work equaling or exceeding 1/2 of 1% of the total Contract Sum, proposes to use the following Subcontractors. The Bidder proposes to perform all other portions of the Work with its own forces. The District reserves the right to qualify all Subcontractors. COPY AND ATTACH ADDITIONAL SHEETS AS NECESSARY.

<u>Portion of the Work</u>	<u>Subcontractor Name and Address</u>

Bidder: _____

By: _____
Bidder or Authorized Agent Signature

-END OF BID OFFER FORM-

DIVISION 08 – OPENINGS
SECTION 087100
FINISH HARDWARE
ADDENDUM #1 - 03/10/2026

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

B. SUMMARY

1. Door hardware for interior and exterior swinging doors.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction and installation details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Other Action Submittals:

1. Door Hardware Schedule: Prepared by or under the supervision of Installer, detailing fabrication and assembly of door hardware, as well as installation procedures and diagrams. Coordinate final door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of door hardware.
- a. Submittal Sequence: Submit door hardware schedule concurrent with submissions of Product Data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate the fabrication of other work that is critical in Project construction schedule.
- b. Format: Comply with scheduling sequence and vertical format in DHI's "Sequence and Format for the Hardware Schedule." Double space entries, and number and date each page.
- c. Content: Include the following information:
- 1) Identification number, location, hand, size, and material of each door and frame.
 - 2) Locations of each door hardware set, cross-referenced to Drawings on floor plans and to door and frame schedule.
 - 3) Complete designations, including name and manufacturer, type, style, function, size, quantity, function, and finish of each door hardware product.
 - 4) Fastenings and other pertinent information.
 - 5) Explanation of abbreviations, symbols, and codes contained in schedule.

- 6) Mounting locations for door hardware.
 - 7) List of related door devices specified in other Sections for each door and frame.
2. Keying Schedule: Prepared by or under the supervision of Installer, detailing Owner's final keying instructions for locks. Include schematic keying diagram and index each key set to unique door designations that are coordinated with the Contract Documents. Coordinate all keying with the Owner. Interior Doors to have Schlage "F" keyway. Exterior doors to have Kaba "Peaks" IC core keyway.

1.3 INFORMATIONAL SUBMITTALS

- A. Warranty: Special warranty specified in this Section.

1.4 QUALITY ASSURANCE

- A. Installer Qualifications: Supplier of products and an employer of workers trained and approved by product manufacturers and an Architectural Hardware Consultant who is available during the course of the Work to consult with Contractor, Architect, and Owner about door hardware and keying.
 1. Warehousing Facilities: In Project's vicinity.
 2. Scheduling Responsibility: Preparation of door hardware and keying schedules.
- B. Source Limitations: Obtain each type of door hardware from a single manufacturer.
- C. Means of Egress Doors: Latches do not require more than 15 lbf (67 N) to release the latch. Locks do not require use of a key, tool, or special knowledge for operation.
- D. Accessibility Requirements: Comply with applicable provisions in the DOJ's 2010 ADA Standards for Accessible Design and ICC A117.1.
 1. Provide operating devices that do not require tight grasping, pinching, or twisting of the wrist and that operate with a force of not more than 5 lbf (22.2 N).
 2. Bevel raised thresholds with a slope of not more than 1:2. Provide thresholds not more than 1/2 inch (13 mm) high.
 3. Closers: Adjust door and gate closer sweep periods so that, from an open position of 90 degrees, the time required to move the door to a position of 12 degrees from the latch is 5 seconds minimum.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Inventory door hardware on receipt and provide secure lock-up for door hardware delivered to Project site.
- B. Tag each item or package separately with identification coordinated with the final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package.

- C. Deliver keys to manufacturer of key control system for subsequent delivery to Owner.

1.6 COORDINATION

- A. Project Software: The use of Allegion Overtur for project specification and collaboration is required.
- B. Installation Templates: Distribute for doors, frames, and other work specified to be factory prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
- C. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.
- D. Existing Openings: Where hardware components are scheduled for application to existing construction or where modifications to existing door hardware are required, field verify existing conditions and coordinate installation of door hardware to suit opening conditions and to provide proper door operation.

1.7 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures including excessive deflection, cracking, or breakage.
 - b. Faulty operation of doors and door hardware.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use.
 - 2. Warranty Period: Two years from date of Substantial Completion, unless otherwise indicated.
 - a. Manual Closers: 30 years from date of Substantial Completion.
 - b. Cylindrical Locksets: 10 years from date of Substantial Completion.
 - c. Continuous Hinges: Limited lifetime.

PART 2 - PRODUCTS

2.1 SCHEDULED DOOR HARDWARE

- A. Provide door hardware for each door as scheduled in Part 3 "Door Hardware Schedule" Article to comply with requirements in this Section as follows:
 - 1. Locks/Cylinders: Schlage, No substitutions.

2. Exit Devices: Von Duprin, No substitutions.
3. Closers: LCN, No substitutions.
4. All Other Hardware: As specified or Owner approved equal during the bidding phase.

2.2 FABRICATION

- A. Manufacturer's Nameplate: Do not provide products that have manufacturer's name or trade name displayed in a visible location except as otherwise approved by Architect.
 1. Manufacturer's identification is permitted on rim of lock cylinders only.
- B. Base Metals: Produce door hardware units of base metal indicated, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and BHMA A156.18.
- C. Fasteners: Provide door hardware manufactured to comply with published templates prepared for machine, wood, and sheet metal screws. Provide screws that comply with commercially recognized industry standards for application intended, except aluminum fasteners are not permitted. Provide Phillips flat-head screws with finished heads to match surface of door hardware, unless otherwise indicated.
 1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.
 2. Spacers or Sex Bolts: For through bolting of hollow-metal doors and wood doors.
 3. Gasketing Fasteners: Provide noncorrosive fasteners for exterior applications and elsewhere as indicated.

2.3 FINISHES

- A. Provide finishes complying with BHMA A156.18 as indicated in door hardware schedule. Field verify existing color of hardware and match with the new hardware.
- B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.
- C. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Steel Doors and Frames: For surface applied door hardware, drill and tap doors and frames according to ANSI/SDI A250.6.

3.3 INSTALLATION

- A. Mounting Heights: Mount door hardware units at heights to comply with the following unless otherwise indicated or required to comply with governing regulations.
 - 1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
- B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing. Do not install surface-mounted items until finishes have been completed on substrates involved.
 - 1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
 - 2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.
- C. Hinges: Install type quantities indicated in door hardware schedule.
- D. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.
- E. Closers: Sex-bolt all closers on wood doors.

3.4 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 - 1. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.

3.5 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items as necessary to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure that door hardware is without damage or deterioration at time of Substantial Completion.

3.6 DOOR HARDWARE SCHEDULE

Hardware Group No. 01 RR

130.1		132.1	134.1		
QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	CYLINDRICAL PRIVACY LOCK W/OUTSIDE INDICATOR	ND40S RHO OS-OCC	626	SCH
1	EA	REG/ PA SURFACE CLOSER - AS REQUIRED	4040XP REG / 4040XP EDA - AS REQUIRED	689	LCN
1	EA	KICK PLATE	8400 10" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
1	EA	MOP PLATE	8400 4" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
1	EA	WALL STOP	WS406/407CCV	630	IVE
3	EA	SILENCER	SR64	GRY	IVE

Hardware Group No. 02 RR-M

147.1	148.1	167.1	168.1	179.1	180.1
QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	PUSH PLATE	8200 4" X 16" TKTX SCREWS AT HM DOORS	630	IVE
1	EA	PULL PLATE	8302 10" 4" X 16" TKTX SCREWS AT HM DOORS	630	IVE
1	EA	REG/ PA SURFACE CLOSER - AS REQUIRED	4040XP REG / 4040XP EDA - AS REQUIRED	689	LCN
1	EA	KICK PLATE	8400 10" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
1	EA	MOP PLATE	8400 4" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
1	EA	WALL STOP	WS406/407CCV	630	IVE
3	EA	SILENCER	SR64	GRY	IVE

Hardware Group No. 06 CL

109.1	109.2	111.1	113.1	128.1.1	129.1
131.1	133.1	138.1.1	141.1	142.1	143.1
144.1	145.1	146.1	151.1	153.1	159.1
161.1	162.1	163.1	164.1	165.1	166.1
173.1	174.1	175.1	176.1	177.1	178.1
QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	ENTRANCE LOCK	ALX53R-RHO-626 FSIC	626	SCH
1	EA	CLOSER, HOLD OPEN	4040XP H / HEDA - AS REQUIRED	689	LCN
1	EA	KICK PLATE	8400 10" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
1	EA	WALL STOP	WS406/407CCV	630	IVE
3	EA	SILENCER	SR64	GRY	IVE

Hardware Group No. 07 CL

127.1	150.1	155.1	170.1	182.1		
QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24		628	SEL
1	EA	ENTRANCE LOCK	ALX53R-RHO-626 FSIC		626	SCH
1	EA	OH STOP	90S		652	GLY
1	EA	CLOSER, HOLD OPEN	4040XP H / HEDA - AS REQUIRED		689	LCN
1	EA	KICK PLATE	8400 10" HIGH B-CS TKTX SCREWS AT HM DOORS		630	IVE
3	EA	SILENCER	SR64		GRY	IVE

Hardware Group No. 19 STO

111.1.1 113.1.1

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
2	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	CONST LATCHING BOLT	FB51P / FB61P	630	IVE
1	EA	DUST PROOF STRIKE	DP1/ DP2 (AS REQ'D)	626	IVE
1	EA	STOREROOM LOCK	ALX80R-RHO-626 FSIC	626	SCH
1	EA	CLOSER, HOLD OPEN	4040XP H / HEDA - AS REQUIRED	689	LCN
2	EA	ARMOR PLATE	8400 34" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
2	EA	WALL STOP	WS406/407CCV	630	IVE
2	EA	SILENCER	SR64	GRY	IVE

@ 111.1.1 & 113.1.1 GC / SUPPLIER NOTE TO ADJUST THE DOOR CLOSERS TO BE ON NON ROOM SIDE OF OPENING AND ADD HOLD OPENS AS LISTED IN THE SET MOVE OPENING 114.1 TO SET 19F-STO FIRE RATED NON HOLD OPEN

Hardware Group No. 19F STO

114.1

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
2	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	CONST LATCHING BOLT	FB51P / FB61P	630	IVE
1	EA	DUST PROOF STRIKE	DP1/ DP2 (AS REQ'D)	626	IVE
1	EA	STOREROOM LOCK	ALX80R-RHO-626 FSIC	626	SCH
2	EA	REG/ PA SURFACE CLOSER - AS REQUIRED	4040XP REG / 4040XP EDA - AS REQUIRED	689	LCN
2	EA	ARMOR PLATE	8400 34" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
2	EA	WALL STOP	WS406/407CCV	630	IVE
1	EA	GASKETING	188SBK PSA	BK	ZER

Hardware Group No. 20 STO

157.1

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	STOREROOM LOCK	ALX80R-RHO-626 FSIC	626	SCH
1	EA	REG/ PA SURFACE CLOSER - AS REQUIRED	4040XP REG / 4040XP EDA - AS REQUIRED	689	LCN
1	EA	KICK PLATE	8400 10" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
1	EA	WALL STOP	WS406/407CCV	630	IVE
3	EA	SILENCER	SR64	GRY	IVE

@ TAG 136.1 ADD CARD READER APPLICATION

Hardware Group No. 23 STO

118.1	138.1	138.2	155.2
-------	-------	-------	-------

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	STOREROOM LOCK	ALX80R-RHO-626 FSIC	626	SCH
1	EA	OH STOP	90S	652	GLY
1	EA	REG/ PA SURFACE CLOSER - AS REQUIRED	4040XP REG / 4040XP EDA - AS REQUIRED	689	LCN
1	EA	KICK PLATE	8400 10" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
3	EA	SILENCER	SR64	GRY	IVE

Hardware Group No. 28 COR

126.1	126.2
-------	-------

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
2	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	FIRE EXIT HARDWARE	9927-L-BE-F-LBR-06-499F	626	VON
1	EA	FIRE EXIT HARDWARE	9927-L-BE-F-LBRAFL-06-499F	626	VON
2	EA	W/ C KEYWAY	20-057-C FSIC 6PIN	626	SCH
2	EA	OH STOP	100SE	630	GLY
2	EA	FIRE/LIFE CLOSER	4040SE	689	LCN
2	EA	KICK PLATE	8400 10" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
1	EA	GASKETING	188SBK PSA	BK	ZER

OMIT CARD READER AT BOTH DOOR LEAFS MAKE NEW SET USE SENTRONIC CLOSERS
@ 126.1 & 126.2 MAKE TRIM BE FUNCTION

USE NEW SET 28 COR

Hardware Group No. 32 EXD

126.1.1

152.1.1

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24 - EPT	<u>DBZ</u> (628)	SEL
1	EA	POWER TRANSFER	EPT10	<u>695</u> (689)	VON
1	EA	ELEC PANIC HARDWARE	QEL-99-EO-CON 24 VDC	<u>710</u> (626)	VON
1	EA	90 DEG OFFSET PULL	8190HD 10" O	<u>695</u> (630)	IVE
1	EA	OH STOP	100S	<u>695</u> (630)	GLY
1	EA	<u>SURFACE CLOSER</u> (REG/ PA SURFACE CLOSER - AS REQUIRED)	4040XP REG / 4040XP EDA - AS REQUIRED	<u>695</u> (689)	LCN
1	EA	DOOR SWEEP	<u>39D</u> (39A)	<u>D</u> (A)	ZER
1	EA	THRESHOLD	<u>566D-V3-226</u> (566A-V3-226)	<u>D</u> (A)	ZER
1	EA	WEATHERSTRIP	BY DOOR AND FRAME MANUFACTURER		B/O
1	EA	CREDENTIAL READER	BY DIVISION 28		B/O
1	EA	DOOR POSITION SWITCH - AS REQUIRED	BY DIVISION 28		B/O
1	EA	POWER SUPPLY	BY DIVISION 28		B/O

DOOR NORMALLY CLOSED AND LOCKED.

ENTRY BY VALID CREDENTIAL.

ALWAYS FREE EGRESS.

UPON LOSS OF POWER, DOOR REMAINS LOCKED.

Hardware Group No. 40 UTY
119.1

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24	<u>DBZ</u> (628)	SEL
<u>2</u>	<u>EA</u>	<u>CONTINUOUS HINGE</u>	<u>SL11 / SL24 - EPT</u>	<u>DBZ</u>	<u>SEL</u>
4	EA	CONTINUOUS HINGE	SL11 / SL24 - EPT	628	SEL
<u>2</u>	<u>EA</u>	<u>POWER TRANSFER</u>	<u>EPT10</u>	<u>695</u>	<u>VON</u>
4	EA	POWER TRANSFER	EPT10	689	VON
1	EA	CONST LATCHING BOLT	FB51P / FB61P	<u>613</u> (630)	IVE
1	EA	DUST PROOF STRIKE	DP1/ DP2 (AS REQ'D)	<u>613</u> (626)	IVE
1	EA	STOREROOM LOCK	ALX80R-RHO-626 FSIC	<u>643e</u> (626)	SCH
1	EA	ELECTRIC STRIKE	6223 FSE CON 12/16/24/28 VAC/VDC	<u>613</u> (630)	VON
1	EA	OH STOP	90S	<u>695</u> (652)	GLY
1	EA	<u>SURFACE CLOSER</u> (PA CLOSER W/SPRING STOP)	4040XP SCUSH	<u>695</u> (689)	LCN
1	EA	RAIN DRIP - AS REQUIRED	<u>142D</u> (142AA)	<u>D</u> (AA)	ZER
1	SET	<u>GASKETING</u> (WEATHERSTRIP)	<u>429D-S</u> (429AA-S)	<u>D</u> (AA)	ZER
2	EA	DOOR SWEEP	39A	A	ZER
<u>2</u>	<u>EA</u>	<u>DOOR SWEEP</u>	<u>39D</u>	<u>D</u>	<u>ZER</u>
4	EA	THRESHOLD	566A-V3-226	A	ZER
<u>1</u>	<u>EA</u>	<u>THRESHOLD</u>	<u>566D-V3-226</u>	<u>D</u>	<u>ZER</u>
1	EA	CREDENTIAL READER	BY DIVISION 28		B/O
2	EA	DOOR POSITION SWITCH - AS REQUIRED	BY DIVISION 28		B/O
1	EA	POWER SUPPLY	BY DIVISION 28		B/O

DOOR NORMALLY CLOSED AND LOCKED.
ENTRY BY VALID CREDENTIAL OR MANUAL KEY OVERRIDE.
ALWAYS FREE EGRESS.
UPON ACTIVATION OF FIRE ALARM OR LOSS OF POWER, DOOR REMAINS LOCKED.

Hardware Group No. 44 UTY-IT

119.2 136.1 1J.1

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	STOREROOM LOCK	ALX80R-RHO-626 FSIC	626	SCH
1	EA	ELECTRIC STRIKE	6211 FSE CON 12/16/24/28 VAC/VDC	630	VON
1	EA	REG/ PA SURFACE CLOSER - AS REQUIRED	4040XP REG / 4040XP EDA - AS REQUIRED	689	LCN
1	EA	KICK PLATE	8400 10" HIGH B-CS TKTX SCREWS AT HM DOORS	630	IVE
1	EA	WALL STOP	WS406/407CCV	630	IVE
3	EA	SILENCER	SR64	GRY	IVE
1	EA	CREDENTIAL READER	BY DIVISION 28		B/O
1	EA	DOOR POSITION SWITCH - AS REQUIRED	BY DIVISION 28		B/O
1	EA	POWER SUPPLY	BY DIVISION 28		B/O

DOOR NORMALLY CLOSED AND LOCKED.

ENTRY BY VALID CREDENTIAL OR MANUAL KEY OVERRIDE.

ALWAYS FREE EGRESS.

UPON ACTIVATION OF FIRE ALARM OR LOSS OF POWER, DOOR REMAINS LOCKED.

Hardware Group No. 47 VES

152.1

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL57 FULL SURFACE	628	SEL
1	EA	PUSH/PULL BAR	9190HD-33"-10"-NO	630	IVE
1	EA	OH STOP	100S	630	GLY
1	EA	REG/ PA SURFACE CLOSER - AS REQUIRED	4040XP REG / 4040XP EDA - AS REQUIRED	689	LCN
1	EA	WEATHERSTRIP	BY DOOR AND FRAME MANUFACTURER		B/O

Hardware Group No. 51 UTY-CUS

147.1.1 167.1.1 179.1.1

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
1	EA	CONTINUOUS HINGE	SL11 / SL24	628	SEL
1	EA	STOREROOM LOCK	ALX80R-RHO-626 FSIC	626	SCH
1	EA	OH STOP	90S	652	GLY
3	EA	SILENCER	SR64	GRY	IVE

NO KICK PLATE, NO CLOSER, OH STOP

END OF SECTION 087100

SCHEDULE - OCCUPANCY LOADS					
AREA NAME	IBC FUNCTION OF SPACE (1004.5)	AREA	OCCUPANT DENSITY	EGRESS OCCUPANT LOAD	OCCUPANT LOAD NOTES
T/ SLAB BASEMENT					
UTILITY	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	1174 SF	300 SF	4	
T/ SLAB				4	
CLASSROOM (4TH)	EDUCATIONAL - CLASSROOM AREA	788 SF	20 SF	40	
CLASSROOM (4TH)	EDUCATIONAL - CLASSROOM AREA	777 SF	20 SF	39	
CLASSROOM (5TH)	EDUCATIONAL - CLASSROOM AREA	794 SF	20 SF	40	
CLASSROOM (5TH)	EDUCATIONAL - CLASSROOM AREA	772 SF	20 SF	39	
CLASSROOM (5TH)	EDUCATIONAL - CLASSROOM AREA	792 SF	20 SF	40	
CLASSROOM (4TH)	EDUCATIONAL - CLASSROOM AREA	783 SF	20 SF	40	
CLASSROOM (2ND)	EDUCATIONAL - CLASSROOM AREA	788 SF	20 SF	40	
CLASSROOM (2ND)	EDUCATIONAL - CLASSROOM AREA	778 SF	20 SF	39	
CLASSROOM (2ND)	EDUCATIONAL - CLASSROOM AREA	786 SF	20 SF	40	
CLASSROOM (3RD)	EDUCATIONAL - CLASSROOM AREA	785 SF	20 SF	40	
CLASSROOM (3RD)	EDUCATIONAL - CLASSROOM AREA	776 SF	20 SF	39	
CLASSROOM (3RD)	EDUCATIONAL - CLASSROOM AREA	790 SF	20 SF	40	
STAFF LOUNGE	EDUCATIONAL - CLASSROOM AREA	913 SF	20 SF	46	
CLASSROOM (1ST)	EDUCATIONAL - CLASSROOM AREA	786 SF	20 SF	40	
CLASSROOM (1ST)	EDUCATIONAL - CLASSROOM AREA	784 SF	20 SF	40	
CLASSROOM (1ST)	EDUCATIONAL - CLASSROOM AREA	784 SF	20 SF	40	
CLASSROOM (KINDER)	EDUCATIONAL - CLASSROOM AREA	791 SF	20 SF	40	
CLASSROOM (KINDER)	EDUCATIONAL - CLASSROOM AREA	783 SF	20 SF	40	
CLASSROOM (KINDER)	EDUCATIONAL - CLASSROOM AREA	788 SF	20 SF	40	
STUDY RM	EDUCATIONAL - CLASSROOM AREA	132 SF	20 SF	7	
STUDY RM	EDUCATIONAL - CLASSROOM AREA	125 SF	20 SF	7	
STUDY RM	EDUCATIONAL - CLASSROOM AREA	131 SF	20 SF	7	
STORAGE	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	465 SF	300 SF	2	
SPEECH	EDUCATIONAL - CLASSROOM AREA	207 SF	20 SF		
TITLE I	EDUCATIONAL - CLASSROOM AREA	761 SF	20 SF	39	
STORAGE	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	307 SF	300 SF	2	
PT/ OT	EDUCATIONAL - CLASSROOM AREA	581 SF	20 SF	30	
ART	EDUCATIONAL - CLASSROOM AREA	1320 SF	20 SF	57	
MUSIC	EDUCATIONAL - CLASSROOM AREA	1473 SF	20 SF	58	
UTILITY	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	429 SF	300 SF	2	
103 KITCH	(none)	869 SF			
STORAGE	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	484 SF	300 SF	2	
CAFETERIA	ASSEMBLY WITHOUT FIXED SEATS - UNCONCENTRATED	4173 SF	1.5 SF		
CONF.	BUSINESS AREAS	350 SF	150 SF	3	
PRINCIPAL	BUSINESS AREAS	236 SF	150 SF	2	
AP	BUSINESS AREAS	198 SF	150 SF	2	
NURSE	BUSINESS AREAS	155 SF	150 SF	2	
MAIN OFF	BUSINESS AREAS	442 SF	150 SF	3	
PE OFF	EDUCATIONAL - CLASSROOM AREA	199 SF	20 SF		
STORAGE	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	384 SF	300 SF	2	
116 GYM	(none)	5193 SF			
BULL PEN	EDUCATIONAL - CLASSROOM AREA	266 SF	20 SF		
CALM RM	EDUCATIONAL - CLASSROOM AREA	211 SF	20 SF		
CONF.	EDUCATIONAL - CLASSROOM AREA	192 SF	20 SF		
FLEX RM	EDUCATIONAL - CLASSROOM AREA	295 SF	20 SF		
ESL	EDUCATIONAL - CLASSROOM AREA	248 SF	20 SF		
SPED	EDUCATIONAL - CLASSROOM AREA	240 SF	20 SF		
SPED	EDUCATIONAL - CLASSROOM AREA	214 SF	20 SF		
STORAGE	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	202 SF	300 SF	1	
STORAGE	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	70 SF	300 SF	1	
STORAGE	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	76 SF	300 SF	1	
RESOURCE	EDUCATIONAL - CLASSROOM AREA	2290 SF	20 SF		
JANITOR	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	52 SF	300 SF	1	
JANITORY	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	56 SF	300 SF	1	
JANITOR	ACCESSORY STORAGE AREAS, MECH EQUIPMENT ROOM	52 SF	300 SF	1	
				995	

LEGEND - CODE SUMMARY SHEET SYMBOLS

▲	EGRESS IN INCHES	EXIT	NON RATED WALL
○	FE	SURFACE MOUNTED FIRE EXTINGUISHER	
○	FEC	FIRE EXTINGUISHER IN CABINET	
(OLXXX)	OCCUPANCY TYPE		
(OLXXX)	OCCUPANCY LOAD		
●●●●●	COMMON PATH OF EGRESS		
— — — — —	TRAVEL DISTANCE		
— — — — —	2-HOUR FIRE RATED WALL		


2014 ILLINOIS PLUMBING CODE			
MINIMUM FIXTURE COUNT			
OCCUPANTS FIXTURES...	(156) MALE	(156) FEMALE	(392) COMBINED
WATERCLOSETS	3 WC	SWC	
2 PER 50 + 1 PER 50 OVER 50 OCCUPANTS			
URINALS	2 UR		
SUB NOT MORE THAN 1/2 WATERCLOSETS FOR MALES			
LAVATORIES	5 LAV	5 LAV	
2 PER 50 + 1 PER 50 OVER 50 OCCUPANTS			
DRINKING FOUNTAINS			6 DF
1 PER 75 OCCUPANTS			

2023-2024 OCCUPANT LOAD: 352 STUDENTS, 20 TEACHERS, 7-10 SUPPORT STAFF

CURRENT CAPACITY			
WATERCLOSETS	MALE	FEMALE	UNISEX
2 PER 50 + 1 PER 50 OVER 50 OCCUPANTS	8WC	21 WC	2 WC
URINALS	13 UR		
SUB NOT MORE THAN 1/2 WATERCLOSETS FOR MALES			
LAVATORIES	8 LAV	9 LAV	2 LAV
2 PER 50 + 1 PER 50 OVER 50 OCCUPANTS			
DRINKING FOUNTAINS			6 DF

BASED ON THE NUMBER OF LAVATORIES TOTAL MAX CAPACITY WITH CURRENT CONFIGURATION WOULD BE 350 MALES, 400 FEMALES FOR A TOTAL BUILDING POPULATION OF 750 OCCUPANTS. PLUMBING FIXTURE QUANTITY CAN BE REDUCED.

ADDITIONS: WHERE AN ADDITION IS ADDED WITHOUT A TOILET ROOM INCLUDED, AT LEAST ONE OF THE EXISTING TOILET ROOMS SERVING THE ADDITION SHALL HAVE AN ACCESSIBLE TOILET ROOM.

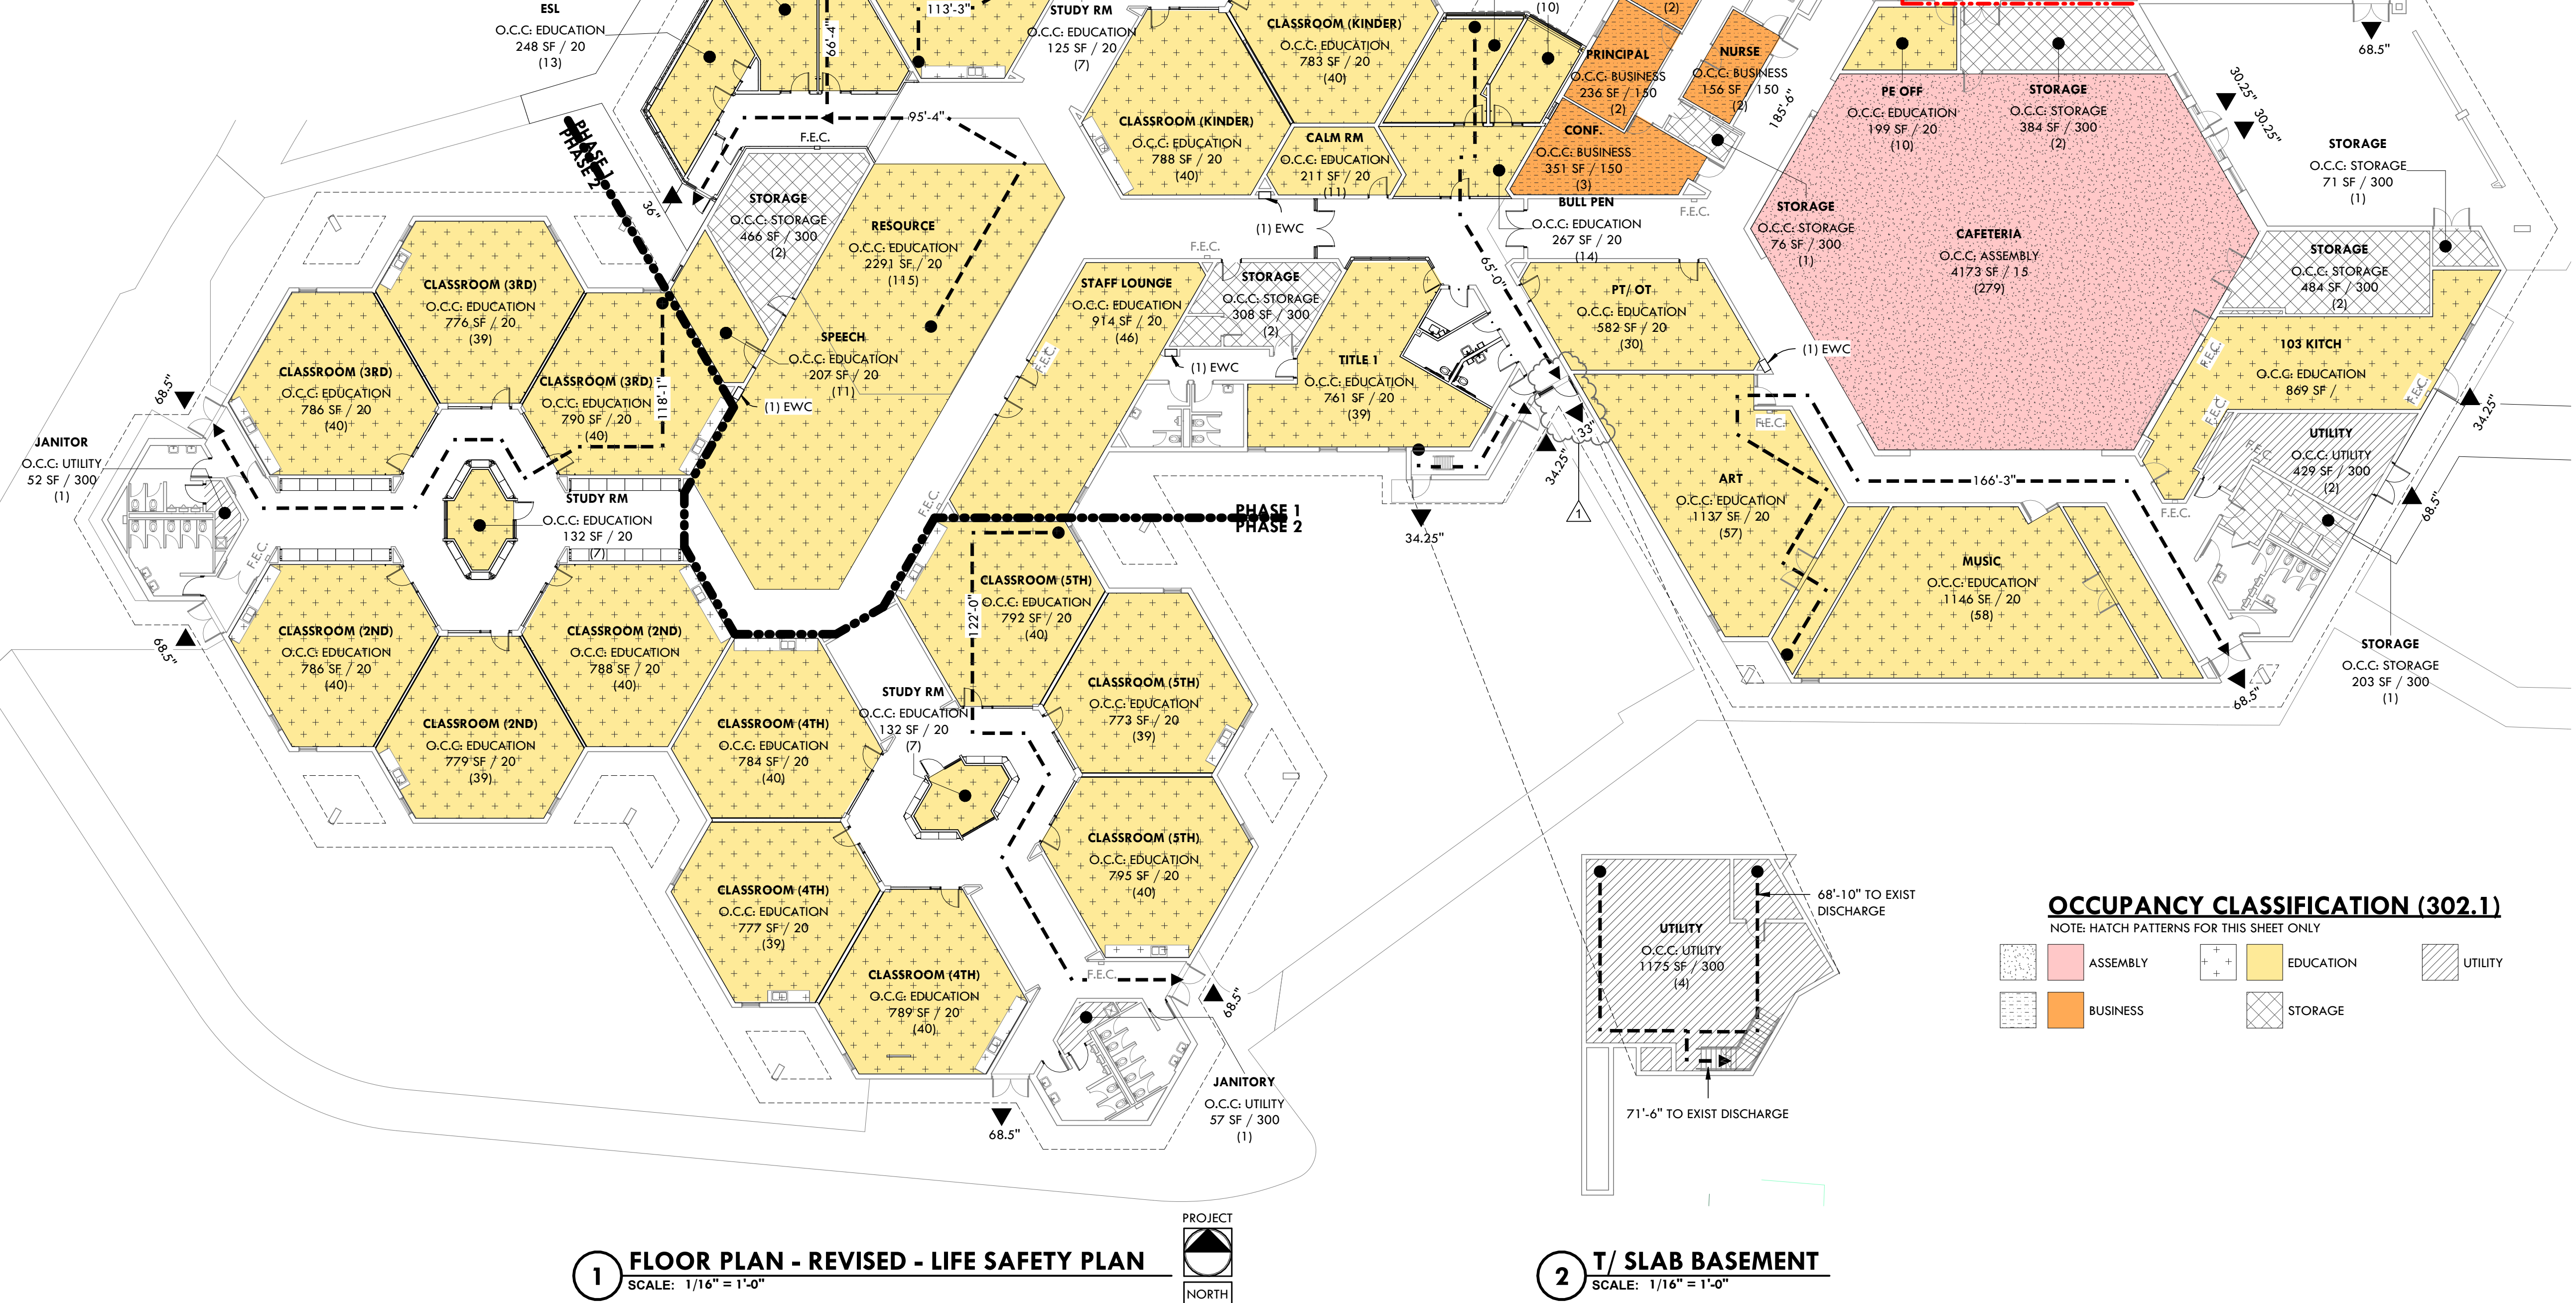

1 FLOOR PLAN - REVISED - LIFE SAFETY PLAN
SCALE: 1/16" = 1'-0"

2 T/ SLAB BASEMENT
SCALE: 1/16" = 1'-0"

CODE SUMMARY

BUILDING CODES:

(WITH LOCAL AMENDMENTS)

BUILDING:
2024 INTERNATIONAL BUILDING CODE
2024 INTERNATIONAL EXISTING BUILDING CODE

ENERGY:
2024 ILLINOIS ENERGY CONSERVATION CODE

FIRE PREVENTION:
2024 INTERNATIONAL FIRE CODE EXCLUDING CHAPTER 4 & WITH PROVISIONS OF 29 ILL. ADM. CODE 1.500 & ISBE SCHOOL EMERGENCY AND CRISIS RESPONSE PLAN

PROJECT DATA:

PROJECT TYPE:
RENOVATION/ ADDITION

USE GROUP:
EDUCATION (E) PRIMARY USE
BUSINESS (B)

CONSTRUCTION TYPE LIMITATIONS (504.3, 504.4 506.2)

CODE CATEGORY	ALLOWED	ACTUAL
BUILDING HEIGHT (STORIES)	3	1
BUILDING HEIGHT (FEET)	75'-0"	27'-4"
AREA PER FLOOR	58,000 SF / 92,000 SF	54,384 SF - EXISTING 453 SF - ADDITION 1 1,062 SF - ADDITION 2 55,900 SF - TOTAL

MECHANICAL, ELECTRICAL AND PLUMBING:
2024 INTERNATIONAL FUEL GAS CODE
2024 INTERNATIONAL MECHANICAL CODE WITH THE STATE FIRE MARSHAL'S RULES TITLED BOILER AND PRESSURE VESSEL SAFETY (41 ILL. ADM. CODE 2120) INSTEAD OF CHAPTER 10
2024 NATIONAL ELECTRICAL CODE
2024 INTERNATIONAL PLUMBING CODE SECTION 405.3.1
ILLINOIS PLUMBING CODE (77 ILL. ADM. CODE 890)
ACCESSIBILITY:
ILLINOIS ACCESSIBILITY CODE (71 ILL. ADM. CODE 400) ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES

BUILDING CONSTRUCTION TYPE:
2B

SPRINKLER SYSTEM:
NFPA 13

BUILDING ELEMENTS FIRE RESISTANCE (TABLE 705.5)

CODE CATEGORY	HOURS
PRIMARY STRUCTURAL FRAME	0
BEARING WALLS	0
EXTERIOR	0
INTERIOR	0
NON BEARING WALLS AND PARTITIONS	0
EXTERIOR BASED ON SEPARATION DISTANCE	0
0 - 4 FEET	1
5 - 9 FEET	1
10 - 29 FEET	1
30 + FEET	0
INTERIOR	0
FLOOR CONSTRUCTION AND ASSOCIATED MEMBERS	0
ROOF CONSTRUCTION AND ASSOCIATED SECONDARY MEMBERS	0

BUILDING ASSEMBLIES FIRE RESISTANCE

CODE CATEGORY	HOURS
FIRE WALLS (706.4)	2
FIRE BARRIERS (707.3)	1
SHAFT ENCLOSURES (713.4)	1
INTERIOR EXIT STAIRWAY AND RAMP CONSTRUCTION (713.4)	1
EXIT PASSAGEWAY (1024.3)	1
HORIZONTAL EXIT (1026.1)	2
INCIDENTAL USES (509.1)	1
CONTROL AREAS (414.2.4)	1
MIXED OCCUPANCIES (508.4)	1
FIRE AREAS (797.3.10)	2
FIRE PARTITIONS (708)	1
CORRIDORS (1020.2)	1
VESTIBULES (1028.2)	1
SMOKE BARRIERS (709.3)	1
HORIZONTAL ASSEMBLIES	0
MIXED OCCUPANCIES (508.4)	0
FIRE AREAS (707.3.10)	2
SMOKE COMPARTMENTS (709)	0
INCIDENTAL USES (509.1)	1
OTHER SEPARATIONS (711.2.4.6)	1

INTERIOR WALL AND CEILING FINISH (TABLE 803.1.3)

CODE CATEGORY
INTERIOR EXIT STAIRWAYS AND RAMPS OR EXIT PASSAGEWAYS
CORRIDORS AND ENCLOSURES FOR EXIT ACCESS STAIRWAYS AND RAMPS
ROOMS AND ENCLOSED SPACES

INTERIOR FLOOR FINISH (804.4.1, 804.4.2)

CODE CATEGORY
ENCLOSURES FOR STAIRWAYS AND RAMPS OR EXIT PASSAGEWAYS & CORRIDORS
ALL AREAS

EGRESS

CODE CATEGORY	ALLOWED	ACTUAL
EGRESS WIDTH FORMULA		
STAIRWAYS (1005.3.1)	OCCUPANTS * 0.3 IN	SEE PLAN
OTHER (1005.3.2)	OCCUPANTS * 0.2 IN	SEE PLAN
COMMON PATH OF EGRESS (1006.2.1)	75 FT	SEE PLAN
EXIT-ACCESS TRAVEL DISTANCE (1017.2)	250 FT	SEE PLAN

ENERGY EFFICIENCY

COMPLIANCE OPTION (C402.1)
CLIMATE ZONE:

CODE CATEGORY

OPAQUE THERMAL ENVELOPE (TABLE C402.1.3, C402.1.4)

ROOFS

INSULATION ABOVE DECK (R-VALUE)

WALLS ABOVE GRADE

MASS (R-VALUE)

WALLS BELOW GRADE

HEATED SLABS (R-VALUE)

UNHEATED (R-VALUE) (C402.2.4)

SLAB ON GRADE

HEATED (R-VALUE)

UNHEATED (R-VALUE)

OPAQUE DOORS

NON SWING DOOR

SWING DOOR

FENESTRATION (TABLE C402.5)

FIXED

OPERABLE

ENTRANCE DOORS

PRESCRIPTIVE

5

ALLOWED

R-VALUE

R-30 CI

R-11.4 CI

R-7.5 CI

N/A

R-15 FOR 36" BELOW + (R-5) FULL SLAB

R-15 FOR 24" BELOW

U-FACTOR

U-0.31

U-0.37

SHGC PF

U-0.36

U-0.45

U-0.63

0.38


0.46

0.61

0.33

0.40


0.53

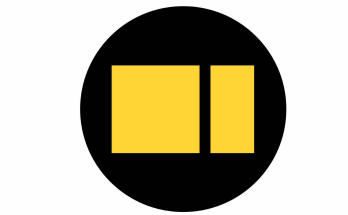

ISSUED FOR:	DATE
ISSUE FOR BID	02/19/2026
1 ADDENDUM #1	03/10/2026

GENERAL NOTES - DEMOLITION

1. BEFORE BEGINNING WORK AT THE SITE AND THROUGHOUT THE COURSE OF WORK, INSPECT AND VERIFY THE LOCATION AND CONDITION OF EVERY ITEM AFFECTED BY THE WORK UNDER THIS CONTRACT AND REPORT DISCREPANCIES TO THE ARCHITECT BEFORE BEGINNING WORK RELATED TO THAT BEING INSPECTED.
2. BEFORE BEGINNING WORK AT THE SITE, INSPECT THE EXISTING BUILDING AND DETERMINE THE EXTENT OF EXISTING FINISHES, SPECIALTIES, EQUIPMENT, AND OTHER ITEMS WHICH MUST BE REMOVED AND REINSTALLED IN ORDER TO PERFORM THE WORK UNDER THIS CONTRACT.
3. THE ARCHITECTURAL DRAWINGS SHOW PRINCIPLE AREAS WHERE WORK MUST BE ACCOMPLISHED UNDER THIS CONTRACT. INCIDENTAL WORK MAY ALSO BE NECESSARY IN AREAS NOT SHOWN ON THE ARCHITECTURAL DRAWINGS DUE TO CHANGES AFFECTING EXISTING MECHANICAL, ELECTRICAL, PLUMBING, AND OTHER SYSTEMS. SUCH INCIDENTAL WORK IS ALSO PART OF THIS CONTRACT. INSPECT THOSE AREAS AND ASCERTAIN WORK NEEDED AND DO THAT WORK IN ACCORDANCE WITH THE CONTRACT REQUIREMENTS AT NO ADDITIONAL COST.
4. PROTECT EXISTING FINISHES TO REMAIN FROM DAMAGE.
5. REPAIR, PATCH, OR REFINISH AS APPLICABLE TO MATCH ADJACENT EXISTING FINISHES, THOSE FINISHES DAMAGED OR NEWLY EXPOSED DURING PERFORMANCE OF THE WORK UNDER THIS CONTRACT.
6. WHERE MATCH EXISTING IS INDICATED, NEW CONSTRUCTION OR FINISHES, SHALL MATCH THE EXISTING IN EVERY PARTICULAR.
7. WHERE PERMANENT REMOVAL OF EXISTING CASEWORK, DOORS AND FRAMES, EQUIPMENT, OR FURNISHINGS IS REQUIRED AND PREVIOUSLY CONCEALED SURFACES ARE TO REMAIN EXPOSED, PATCH PREVIOUSLY CONCEALED SURFACES TO MATCH ADJACENT EXPOSED SURFACES. WHERE SUCH SURFACES ARE SCHEDULED TO RECEIVE NEW FINISHES, PREPARE THE SURFACES TO RECEIVE THE NEW FINISHES.
8. WHERE CUTTING OF EXISTING SURFACES OR REMOVAL OF EXISTING SURFACES IS REQUIRED TO PERFORM THE WORK UNDER THIS CONTRACT, AND NEW FINISH IS NOT INDICATED, FILL RESULTING OPENINGS AND PATCH THE SURFACE AFTER DOING THE WORK AND FINISH TO MATCH ADJACENT EXISTING SURFACES.
9. REFER TO NEW WORK PLANS TO COORDINATE EXTENT OF DEMOLITION REQUIRED.
10. REFER TO MECHANICAL, ELECTRICAL, PLUMBING, AND FIRE PROTECTION DRAWINGS FOR ADDITIONAL DEMOLITION REQUIRED. CONTRACTOR TO NOTIFY ARCHITECT IMMEDIATELY UPON DISCOVERY OF CONFLICT OR DISCREPANCY WITH ITEMS INDICATED TO BE REMOVED.
11. WHERE NOT SPECIFICALLY NOTED, CONTRACTOR SHALL MODIFY EXISTING FLOORING AND CEILING CONSTRUCTION TO REMAIN AS REQUIRED TO ABUT NEW CONSTRUCTION AND MATCH ADJACENT EXISTING CONDITIONS.
12. COORDINATE SLAB REMOVAL AND REPLACEMENT WITH PLUMBING AND ELECTRICAL UNDERGROUND AND IN-SLAB WORK.
13. WHERE AN ITEM IS SHOWN TO BE REMOVED OR DEMOED ALL MECHANICAL, ELECTRICAL, AND PLUMBING COMPONENTS SHALL BE REMOVED WITH IT UNLESS PIPING SHALL BE REMOVED TO WITHIN NEAREST WALL TO REMAIN AND CAPPED. ELECTRICAL WIRING AND CONDUIT SHALL BE REMOVED BACK TO NEAREST JUNCTION BOX TO REMAIN. DUCTS AND TERMINALS SHOULD BE REMOVED AS FAR AS NECESSARY FOR NEW DISTRIBUTION SYSTEM OR COMPONENTS TO THE INTO, OR CAP WITHIN CONCEALED SPACE.
14. ALL EXISTING CAMERAS AND WIRELESS ACCESS POINTS SHOULD BE REMOVED FOR REINSTALLATION IN SAME OR SIMILAR LOCATIONS AFTER CONSTRUCTION IS COMPLETE.
15. REMOVE AND DISPOSE OF EXISTING SIGNAGE PER PHASE. REMOVE ALL REMAINING RESIDUE AND PREPARE SURFACE FOR NEW FINISHES. WHERE SIGNAGE IS REMOVED AND NO NEW WORK IS SCHEDULED, REMOVE ALL REMAINING RESIDUE AND RESTORE SURFACE TO MATCH EXISTING.

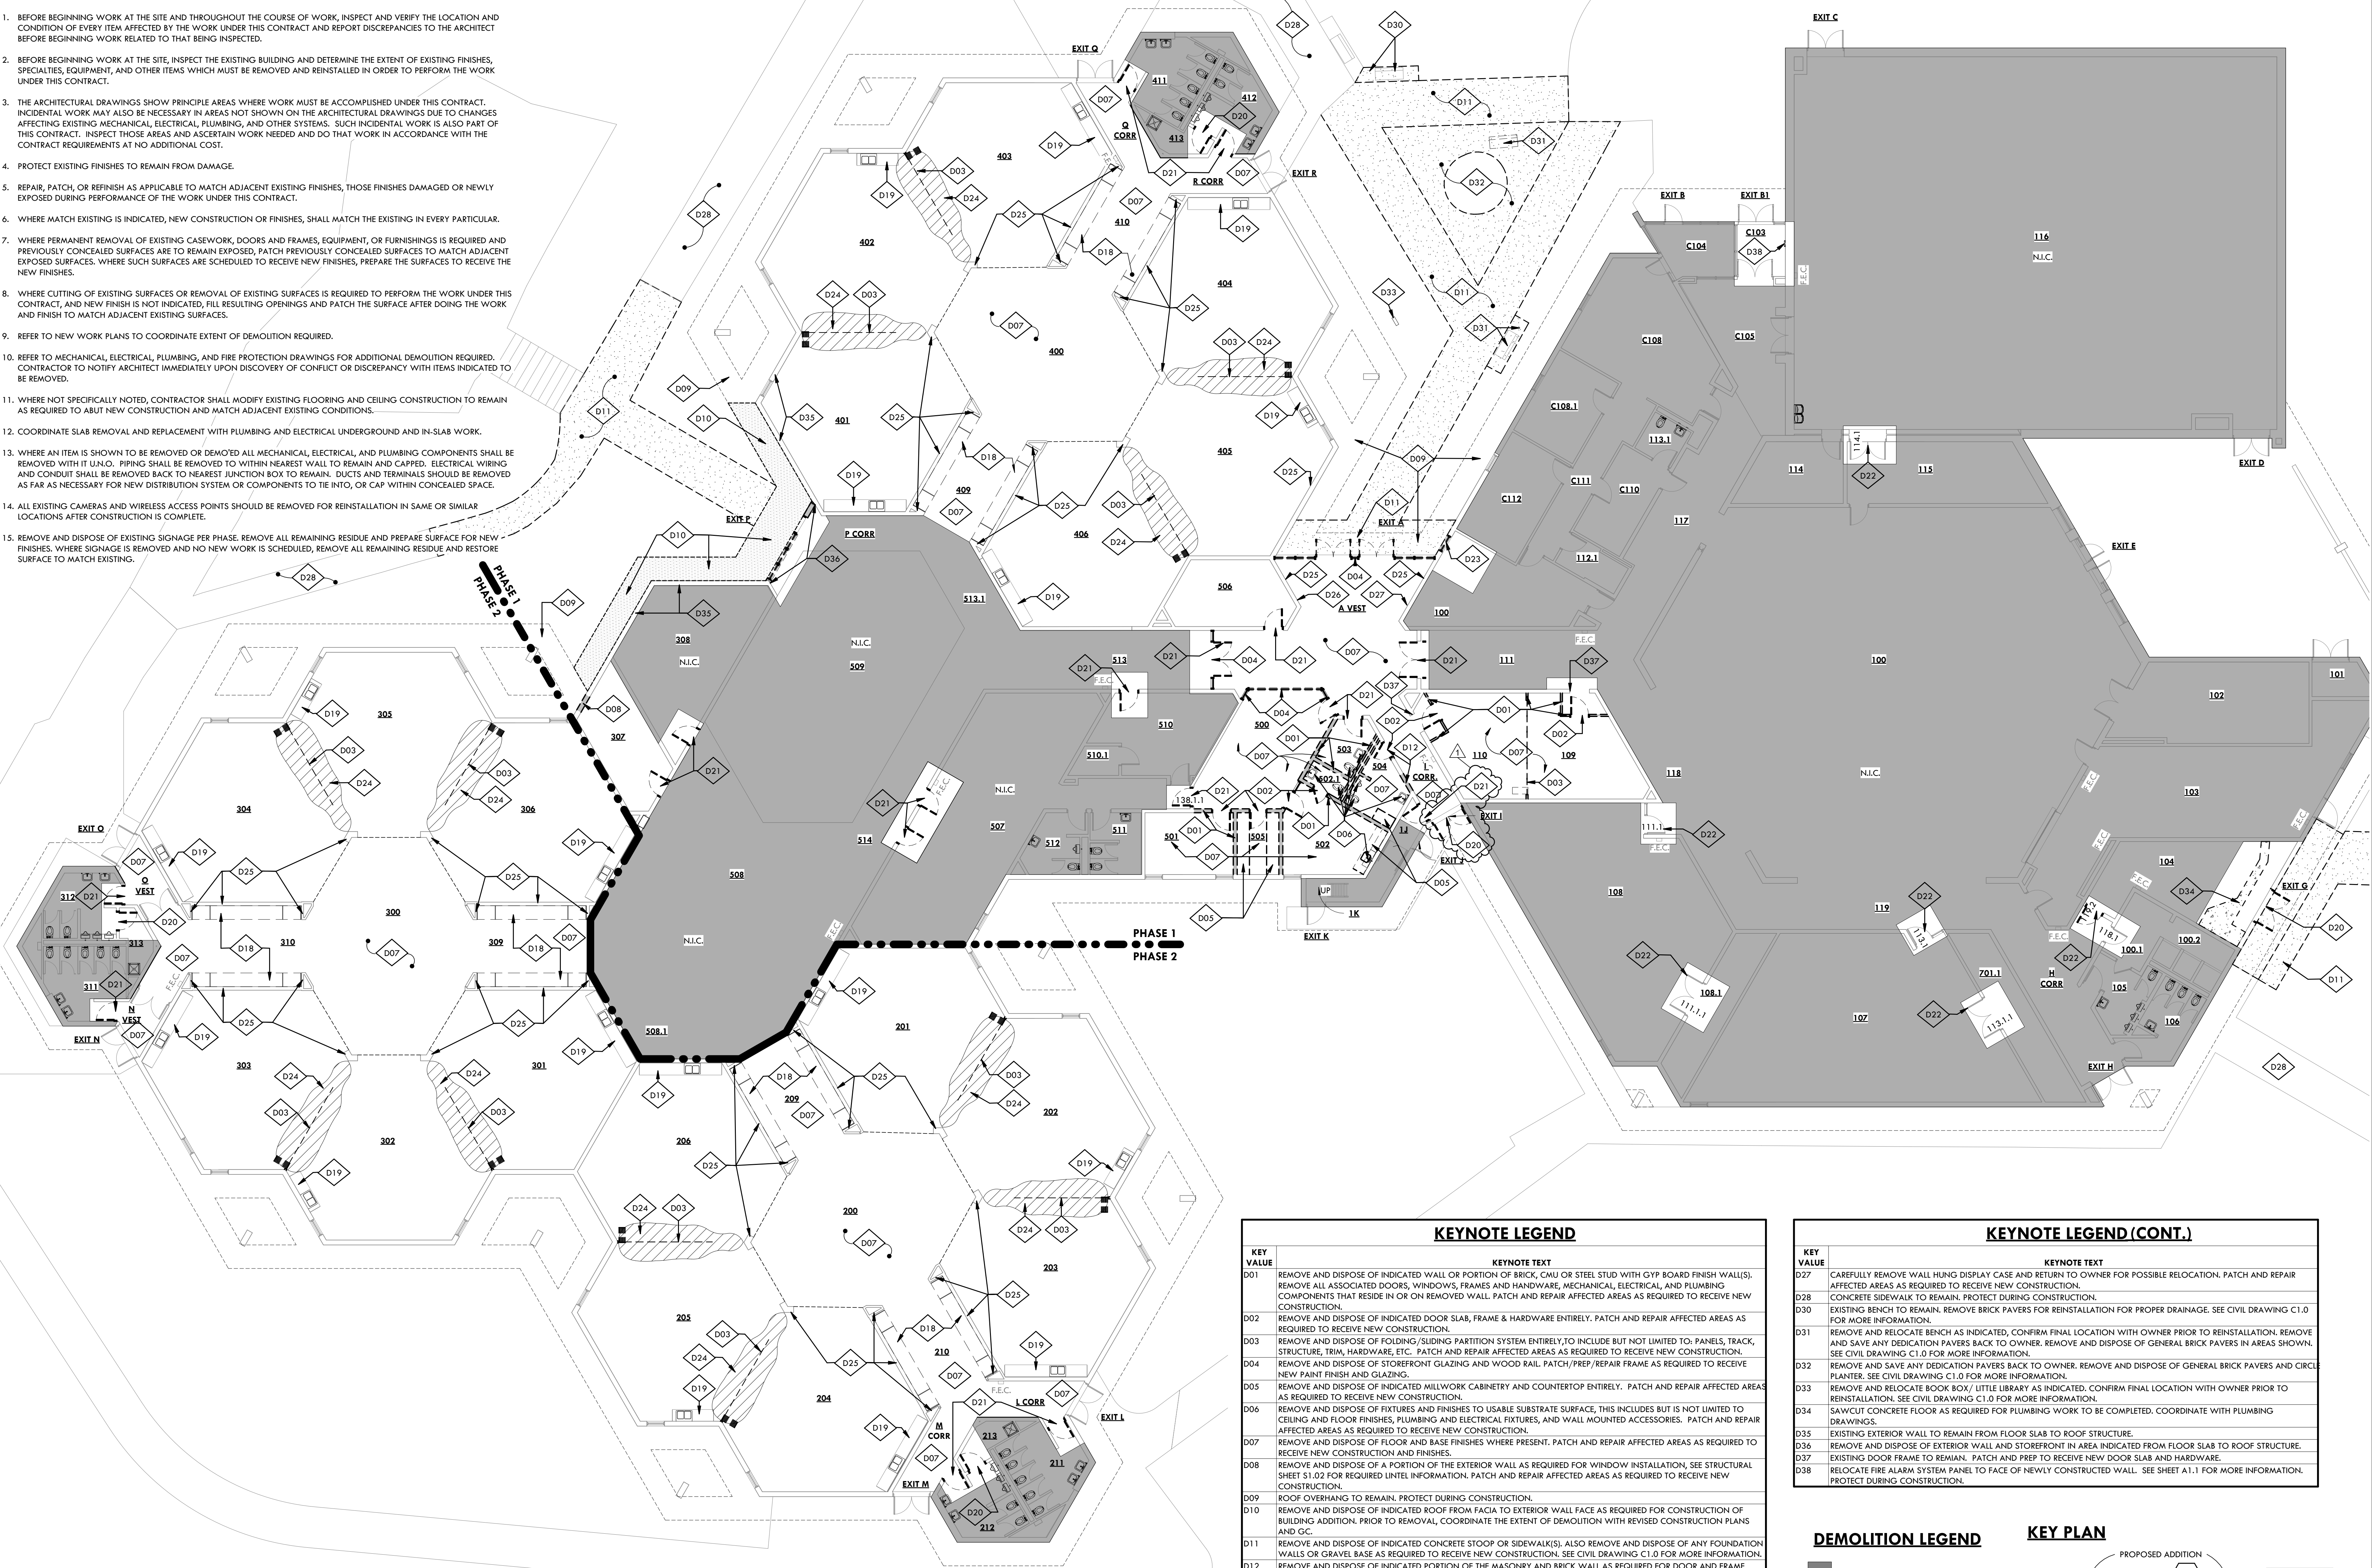

1 1ST FLOOR PLAN - DEMOLITION
SCALE: 3/32" = 1'-0"


KEYNOTE LEGEND	
KEY VALUE	KEYNOTE TEXT
D01	REMOVE AND DISPOSE OF INDICATED WALL OR PORTION OF BRICK, CMU OR STEEL STUD WITH GYP BOARD FINISH WALL(S). REMOVE ALL ASSOCIATED DOORS, WINDOWS, FRAMES AND HARDWARE, MECHANICAL, ELECTRICAL, AND PLUMBING COMPONENTS THAT RESIDE IN OR ON REMOVED WALL. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D02	REMOVE AND DISPOSE OF INDICATED DOOR SLAB, FRAME & HARDWARE ENTIRELY. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D03	REMOVE AND DISPOSE OF FOLDING/SLIDING PARTITION SYSTEM ENTIRELY, TO INCLUDE BUT NOT LIMITED TO: PANELS, TRACK, STRUCTURE, TRIM, HARDWARE, ETC.. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D04	REMOVE AND DISPOSE OF STOREFRONT GLAZING AND WOOD RAIL. PATCH/PREP/REPAIR FRAME AS REQUIRED TO RECEIVE NEW PAINT FINISH AND GLAZING.
D05	REMOVE AND DISPOSE OF INDICATED MILLWORK CABINERY AND COUNTERTOP ENTIRELY. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D06	REMOVE AND DISPOSE OF FIXTURES AND FINISHES TO USABLE SUBSTRATE SURFACE, THIS INCLUDES BUT IS NOT LIMITED TO: CEILING AND FLOOR FINISHES, PLUMBING AND ELECTRICAL FIXTURES, AND WALL MOUNTED ACCESSORIES. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D07	REMOVE AND DISPOSE OF FLOOR AND BASE FINISHES WHERE PRESENT. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION AND FINISHES.
D08	REMOVE AND DISPOSE OF A PORTION OF THE EXTERIOR WALL AS REQUIRED FOR WINDOW INSTALLATION, SEE STRUCTURAL SHEET S1.02 FOR REQUIRED LINTEL INFORMATION. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D09	ROOF OVERHANG TO REMAIN. PROTECT DURING CONSTRUCTION.
D10	REMOVE AND DISPOSE OF INDICATED ROOF FROM FACIA TO EXTERIOR WALL FACE AS REQUIRED FOR CONSTRUCTION OF BUILDING ADDITION. PRIOR TO REMOVAL, COORDINATE THE EXTENT OF DEMOLITION WITH REVISED CONSTRUCTION PLANS AND ETC.
D11	REMOVE AND DISPOSE OF INDICATED CONCRETE STOOP OR SIDEWALK(S). ALSO REMOVE AND DISPOSE OF ANY FOUNDATION WALLS OR GRAVEL BASE AS REQUIRED TO RECEIVE NEW CONSTRUCTION. SEE CIVIL DRAWING C1.0 FOR MORE INFORMATION.
D12	REMOVE AND DISPOSE OF INDICATED PORTION OF THE MASONRY AND BRICK WALL AS REQUIRED FOR DOOR AND FRAME INSTALLATION. SEE STRUCTURAL SHEET S1.02 FOR REQUIRED LINTEL INFORMATION. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D18	REMOVE AND DISPOSE OF INDICATED MILLWORK CLOSETS, SHELVES, TRIM, SOFFIT AND COATHOOKS ENTIRELY TO BRICK OR CMU SIDEWALLS AND DRYWALL BACKWALL. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D19	MILLWORK CABINERY, COUNTERTOP, SINK AND FAUCET TO REMAIN. PROTECT DURING CONSTRUCTION.
D20	REMOVE AND DISPOSE OF INDICATED FRAME, DOOR SLAB, AND HARDWARE. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW FRAME, DOOR SLAB, AND HARDWARE IN SAME LOCATION.
D21	REMOVE AND DISPOSE OF INDICATED DOOR SLAB AND HARDWARE ONLY, FRAME TO REMAIN. RETROFIT FRAME AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D22	REMOVE AND DISPOSE OF INDICATED DOOR HARDWARE ENTIRELY. RETROFIT FRAME AS REQUIRED TO RECEIVE NEW HARDWARE ASSEMBLIES.
D23	REMOVE AND DISCARD WINDOW AND FRAME. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW WALL INFILL CONSTRUCTION TO MATCH ADJACENT EXTERIOR AND INTERIOR SURFACES.
D24	SELECTIVELY REMOVE AND DISPOSE OF INDICATED FLOOR AND BASE FINISHES, ONLY AS REQUIRED FOR DEMOLITION OF INDICATED WALLS. REMAINING ADJACENT FLOOR AND BASE FINISHES TO REMAIN. PROTECT DURING CONSTRUCTION.
D25	WALL TO REMAIN. PROTECT DURING CONSTRUCTION.
D26	CAREFULLY REMOVE BUILDING DEDICATION PLAQUE SAVE FOR RELOCATION PER OWNER DIRECTION. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.

KEYNOTE LEGEND (CONT.)	
KEY VALUE	KEYNOTE TEXT
D27	CAREFULLY REMOVE WALL HUNG DISPLAY CASE AND RETURN TO OWNER FOR POSSIBLE RELOCATION. PATCH AND REPAIR AFFECTED AREAS AS REQUIRED TO RECEIVE NEW CONSTRUCTION.
D28	CONCRETE SIDEWALK TO REMAIN. PROTECT DURING CONSTRUCTION.
D30	EXISTING BENCH TO REMAIN. REMOVE BRICK PAVERS FOR REINSTALLATION FOR PROPER DRAINAGE. SEE CIVIL DRAWING C1.0 FOR MORE INFORMATION.
D31	REMOVE AND RELOCATE BENCH AS INDICATED, CONFIRM FINAL LOCATION WITH OWNER PRIOR TO REINSTALLATION. REMOVE AND SAVE ANY DEDICATION PAVERS BACK TO OWNER. REMOVE AND DISPOSE OF GENERAL BRICK PAVERS IN AREAS SHOWN. SEE CIVIL DRAWING C1.0 FOR MORE INFORMATION.
D32	REMOVE AND SAVE ANY DEDICATION PAVERS BACK TO OWNER. REMOVE AND DISPOSE OF GENERAL BRICK PAVERS AND CIRCLE PLANTER. SEE CIVIL DRAWING C1.0 FOR MORE INFORMATION.
D33	REMOVE AND RELOCATE BOOK BOX/LITTLE LIBRARY AS INDICATED. CONFIRM FINAL LOCATION WITH OWNER PRIOR TO REINSTALLATION. SEE CIVIL DRAWING C1.0 FOR MORE INFORMATION.
D34	SAWCUT CONCRETE FLOOR AS REQUIRED FOR PLUMBING WORK TO BE COMPLETED. COORDINATE WITH PLUMBING DRAWINGS.
D35	EXISTING EXTERIOR WALL TO REMAIN FROM FLOOR SLAB TO ROOF STRUCTURE.
D36	REMOVE AND DISPOSE OF EXTERIOR WALL AND STOREFRONT IN AREA INDICATED FROM FLOOR SLAB TO ROOF STRUCTURE.
D37	EXISTING DOOR FRAME TO REMAIN. PATCH AND PREP TO RECEIVE NEW DOOR SLAB AND HARDWARE.
D38	RELOCATE FIRE ALARM SYSTEM PANEL TO FACE OF NEWLY CONSTRUCTED WALL. SEE SHEET A1.1 FOR MORE INFORMATION. PROTECT DURING CONSTRUCTION.

DEMOLITION LEGEND

- NOT IN CONTRACT (N.I.C.)
- SELECTIVE FLOOR FINISH REMOVAL
- EXTERIOR EAVE DEMOLITION
- PHASE MATCH LINE

KEY PLAN

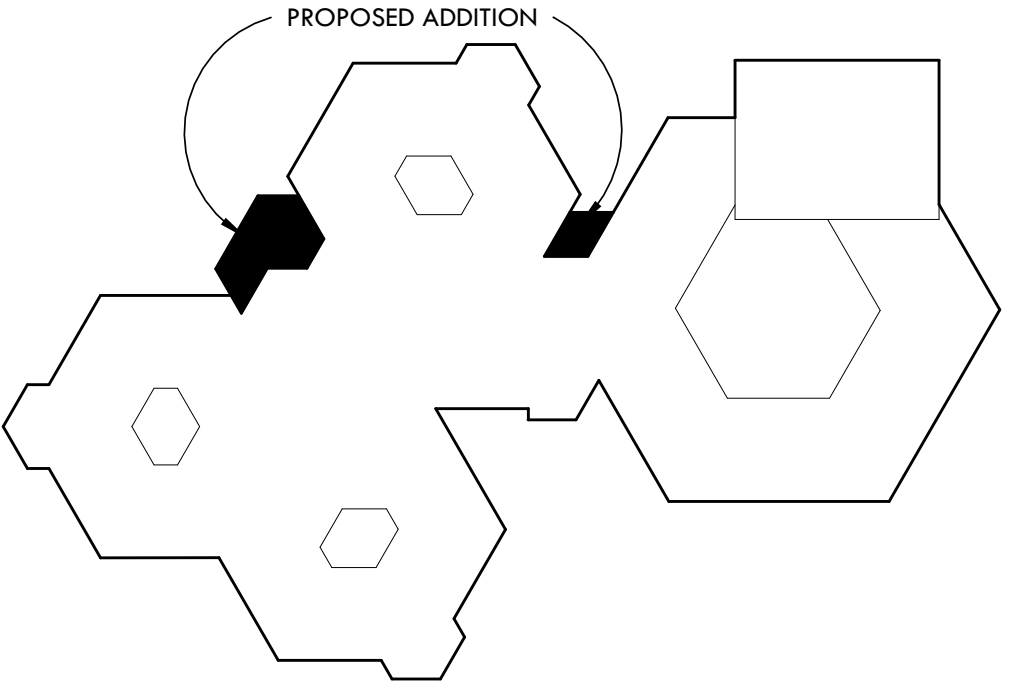


1ST FLOOR PLAN - DEMOLITION


GENERAL NOTES - FLOOR PLAN

1. DIMENSIONS ON FLOOR PLAN ARE BASED ON FACE OF FINISHED WALL TO FACE OF FINISHED WALL (NOMINAL).
2. VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE. PORTIONS OF EXISTING CONSTRUCTION MAY HAVE BEEN REMOVED BY OWNER.
3. MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE WITH OWNER ANY DISRUPTION IN SERVICES REQUIRED TO PERFORM WORK OR TO MODIFY EXISTING PIPING, DUCTWORK OR ANY ASSOCIATED EQUIPMENT.
4. REFER TO SHEET A2.1 FOR ROOM FINISH SCHEDULE AND NOTES.
5. REFER TO SHEET A2.2 FOR OPENING SCHEDULES, DETAILS AND NOTES.

KEYNOTE LEGEND	
KEY VALUE	KEYNOTE TEXT
A11	INSTALL FIRE ALARM ANNUNCIATOR PANEL AS SPECIFIED BY MANUFACTURER, AND RELOCATE EXISTING FIRE ALARM SYSTEM PANEL TO FACE OF NEW WALL. SEE ELECTRICAL SHEETS FOR MORE INFORMATION.
A19	INSTALL RELOCATED BENCHES AS INDICATED. SEE CIVIL DRAWING C2.0 FOR MORE INFORMATION.
A20	INSTALL CONCRETE SIDEWALK AS INDICATED. SEE CIVIL DRAWING C2.0 FOR MORE INFORMATION.
A21	REPLACE THE PREVIOUSLY SAWCUT CONCRETE FLOOR AS REQUIRED. COORDINATE WITH THE STRUCTURAL AND PLUMBING DRAWINGS.

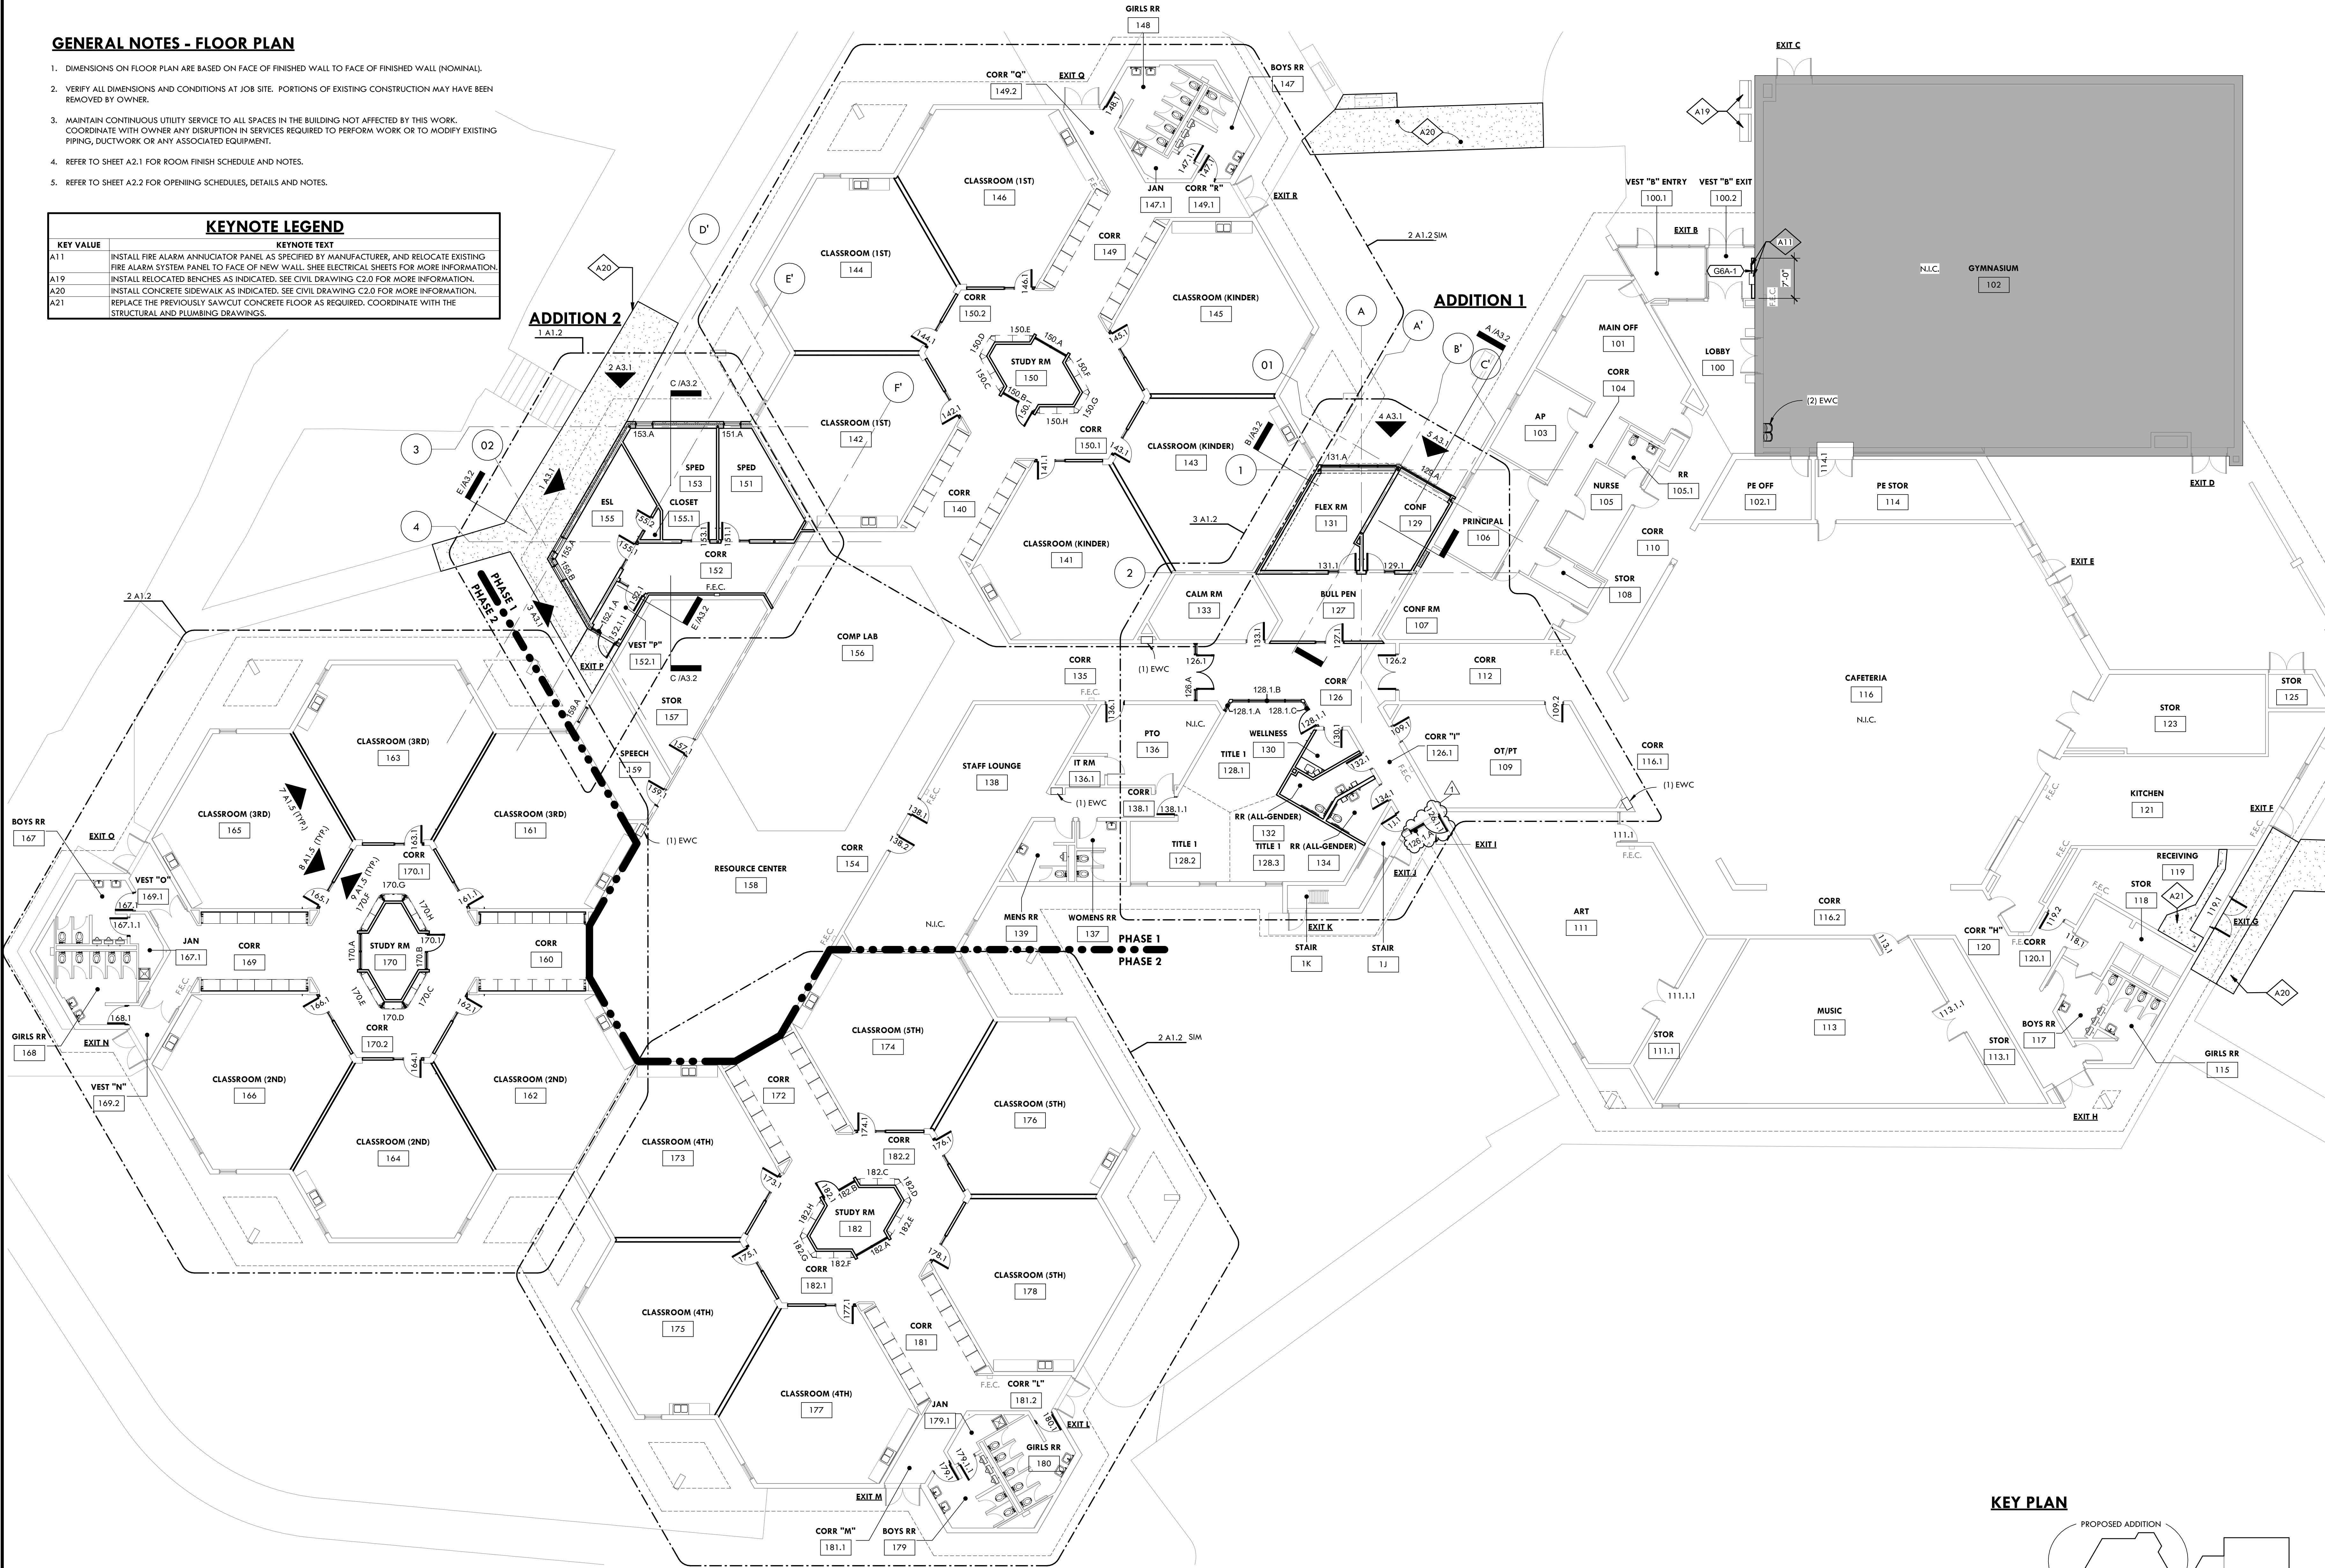

1 1ST FLOOR PLAN
SCALE: 3/32" = 1'-0"




GENERAL LEGEND


NOTE: HATCH PATTERNS FOR THIS SHEET ONLY


- NOT IN CONTRACT (N.I.C.)
- PHASE MATCH LINE

KEY PLAN


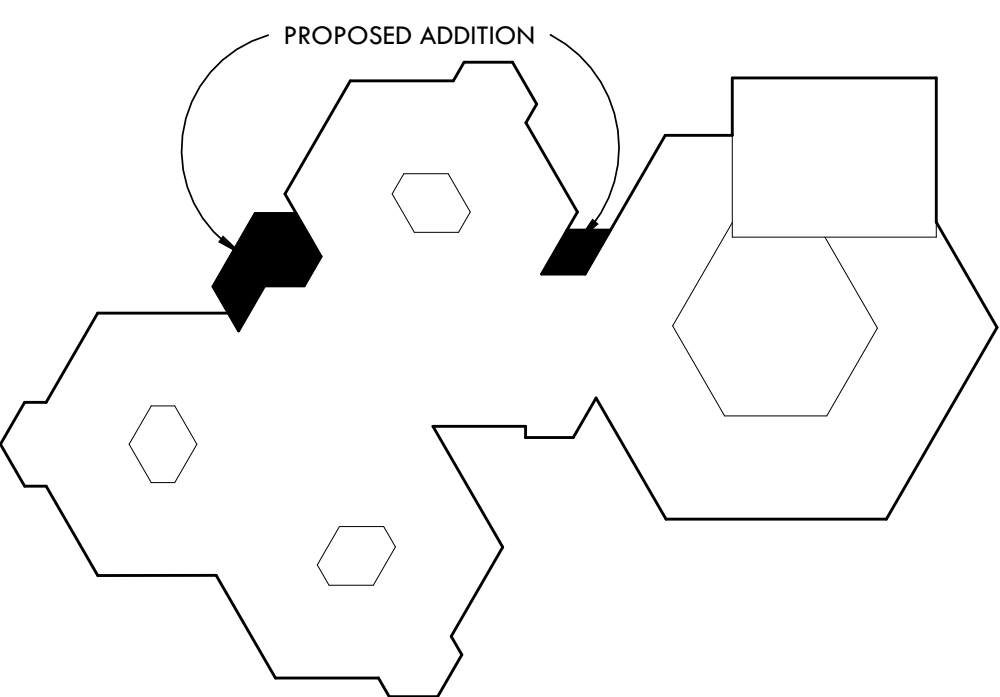


1ST FLOOR PLAN





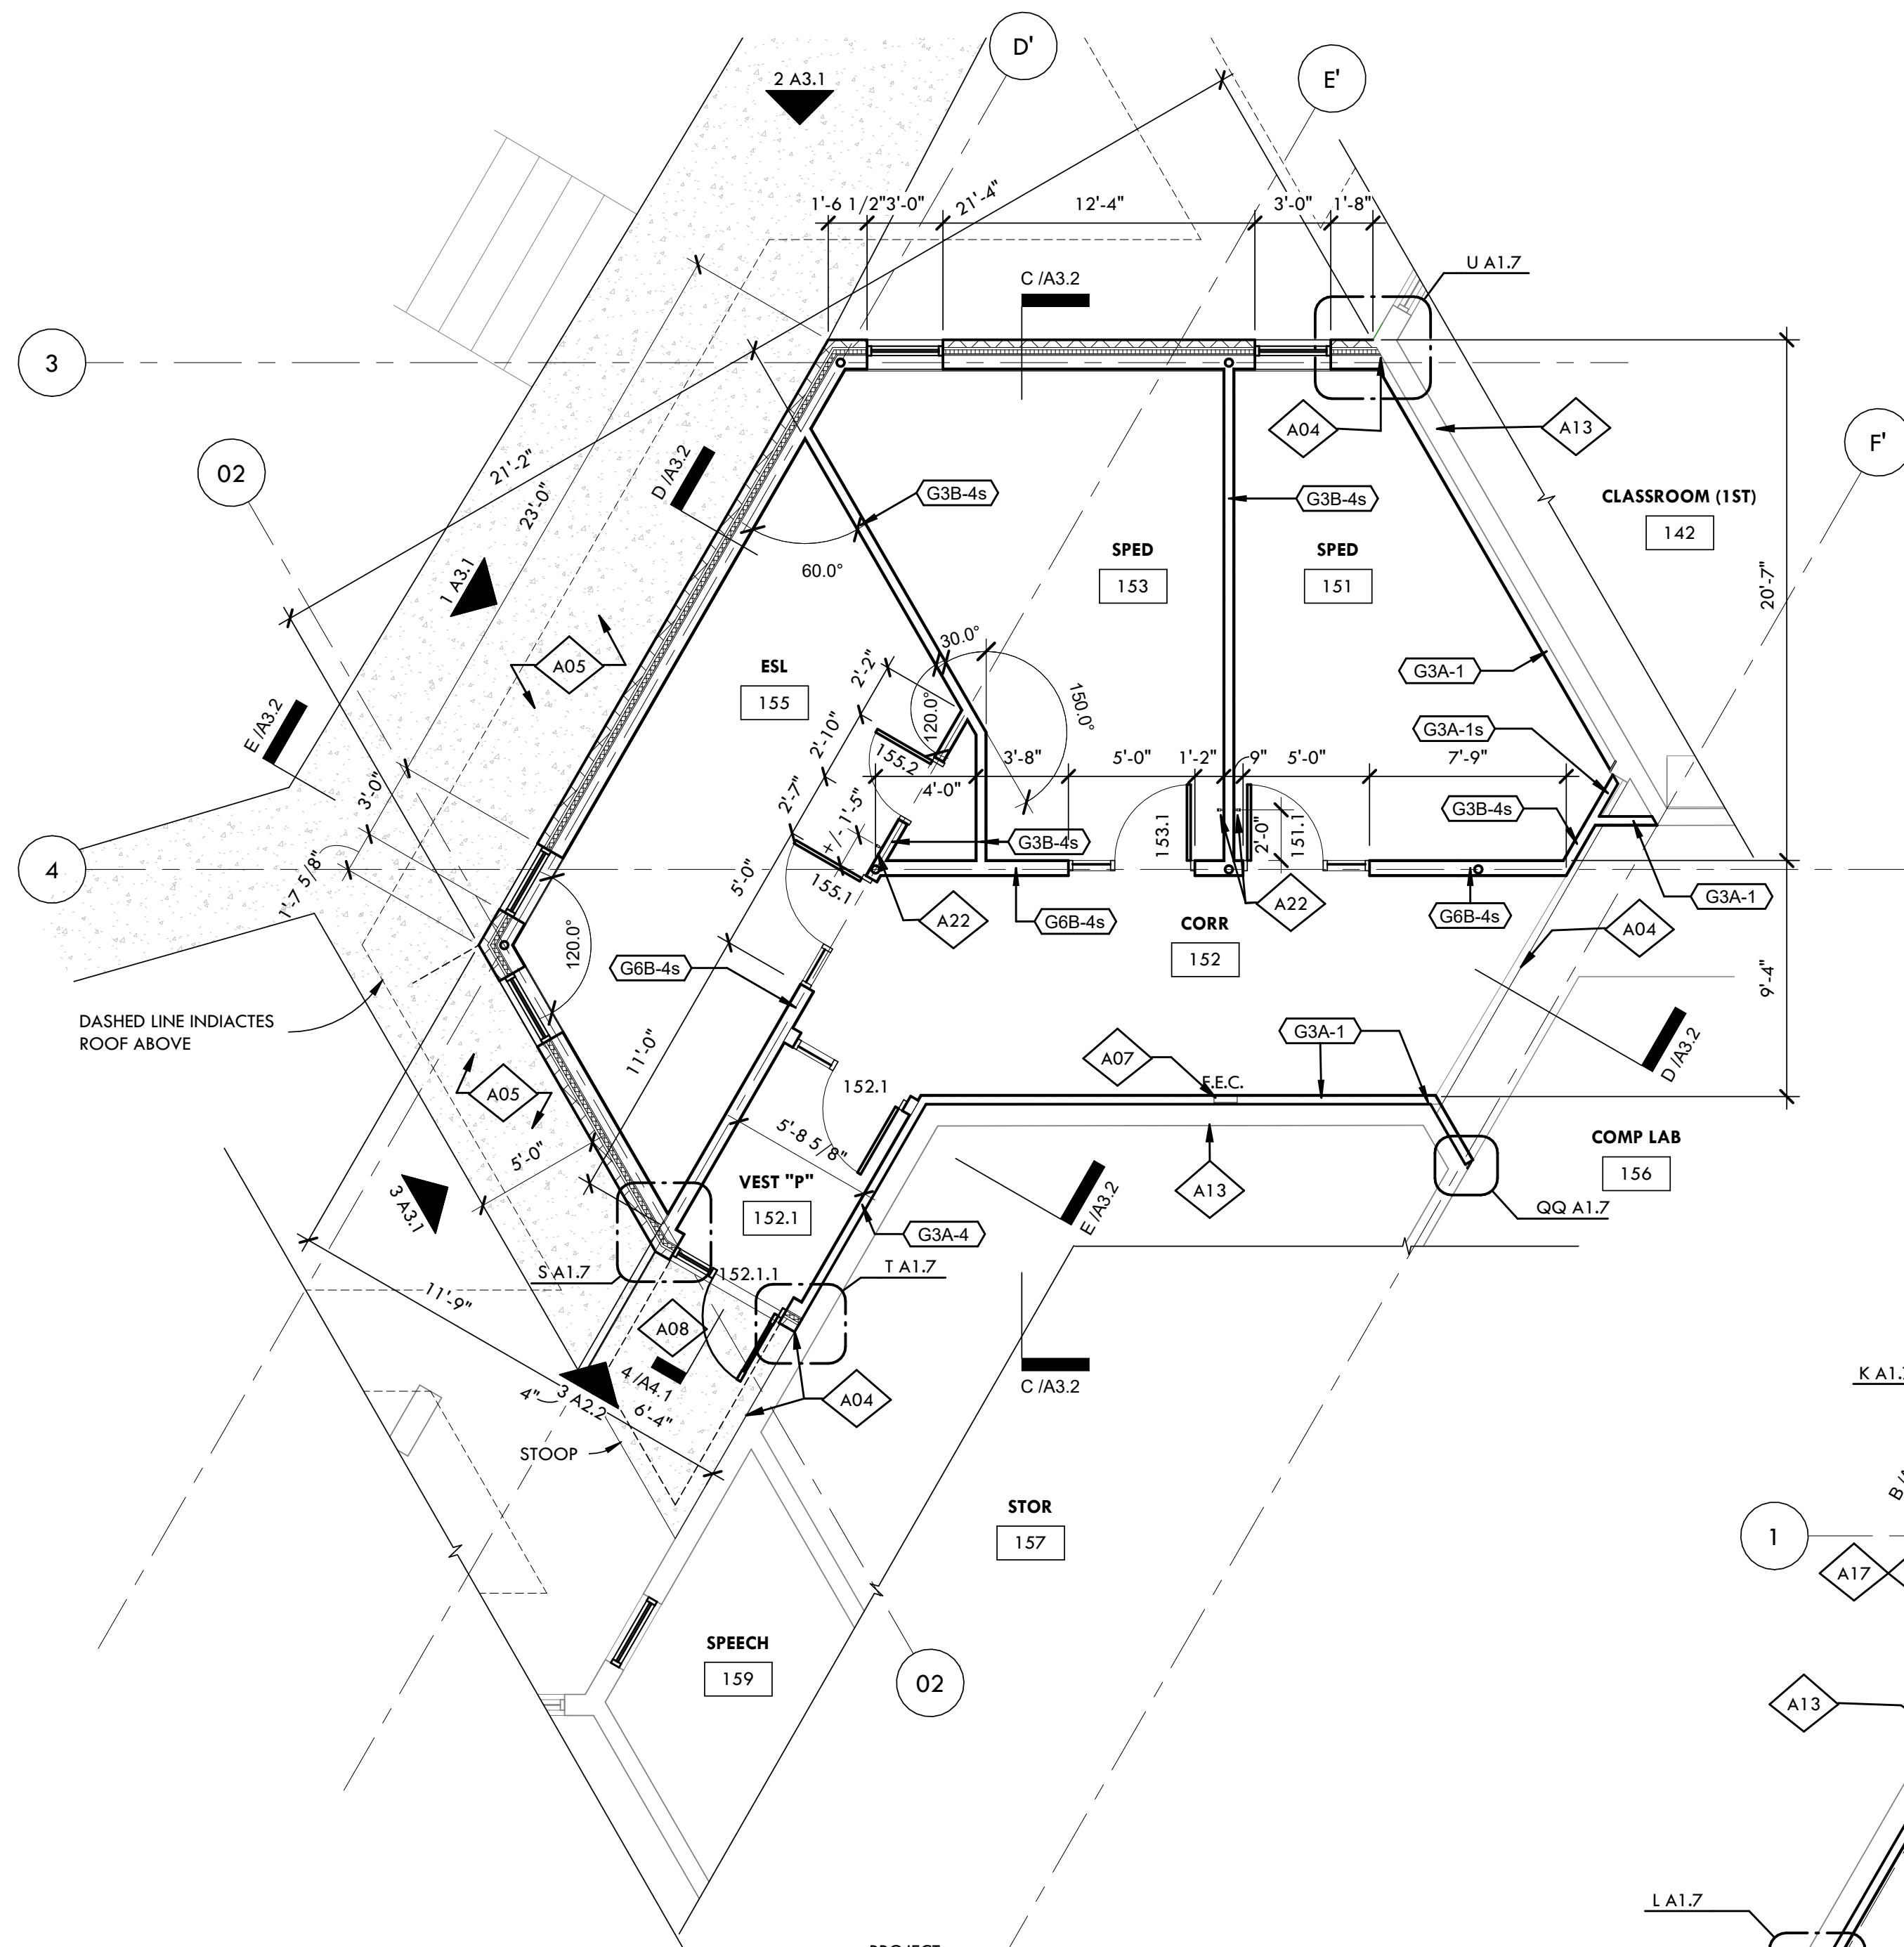


1 ENLARGED PLAN - ADDITION 2
SCALE: 3/16" = 1'-0"

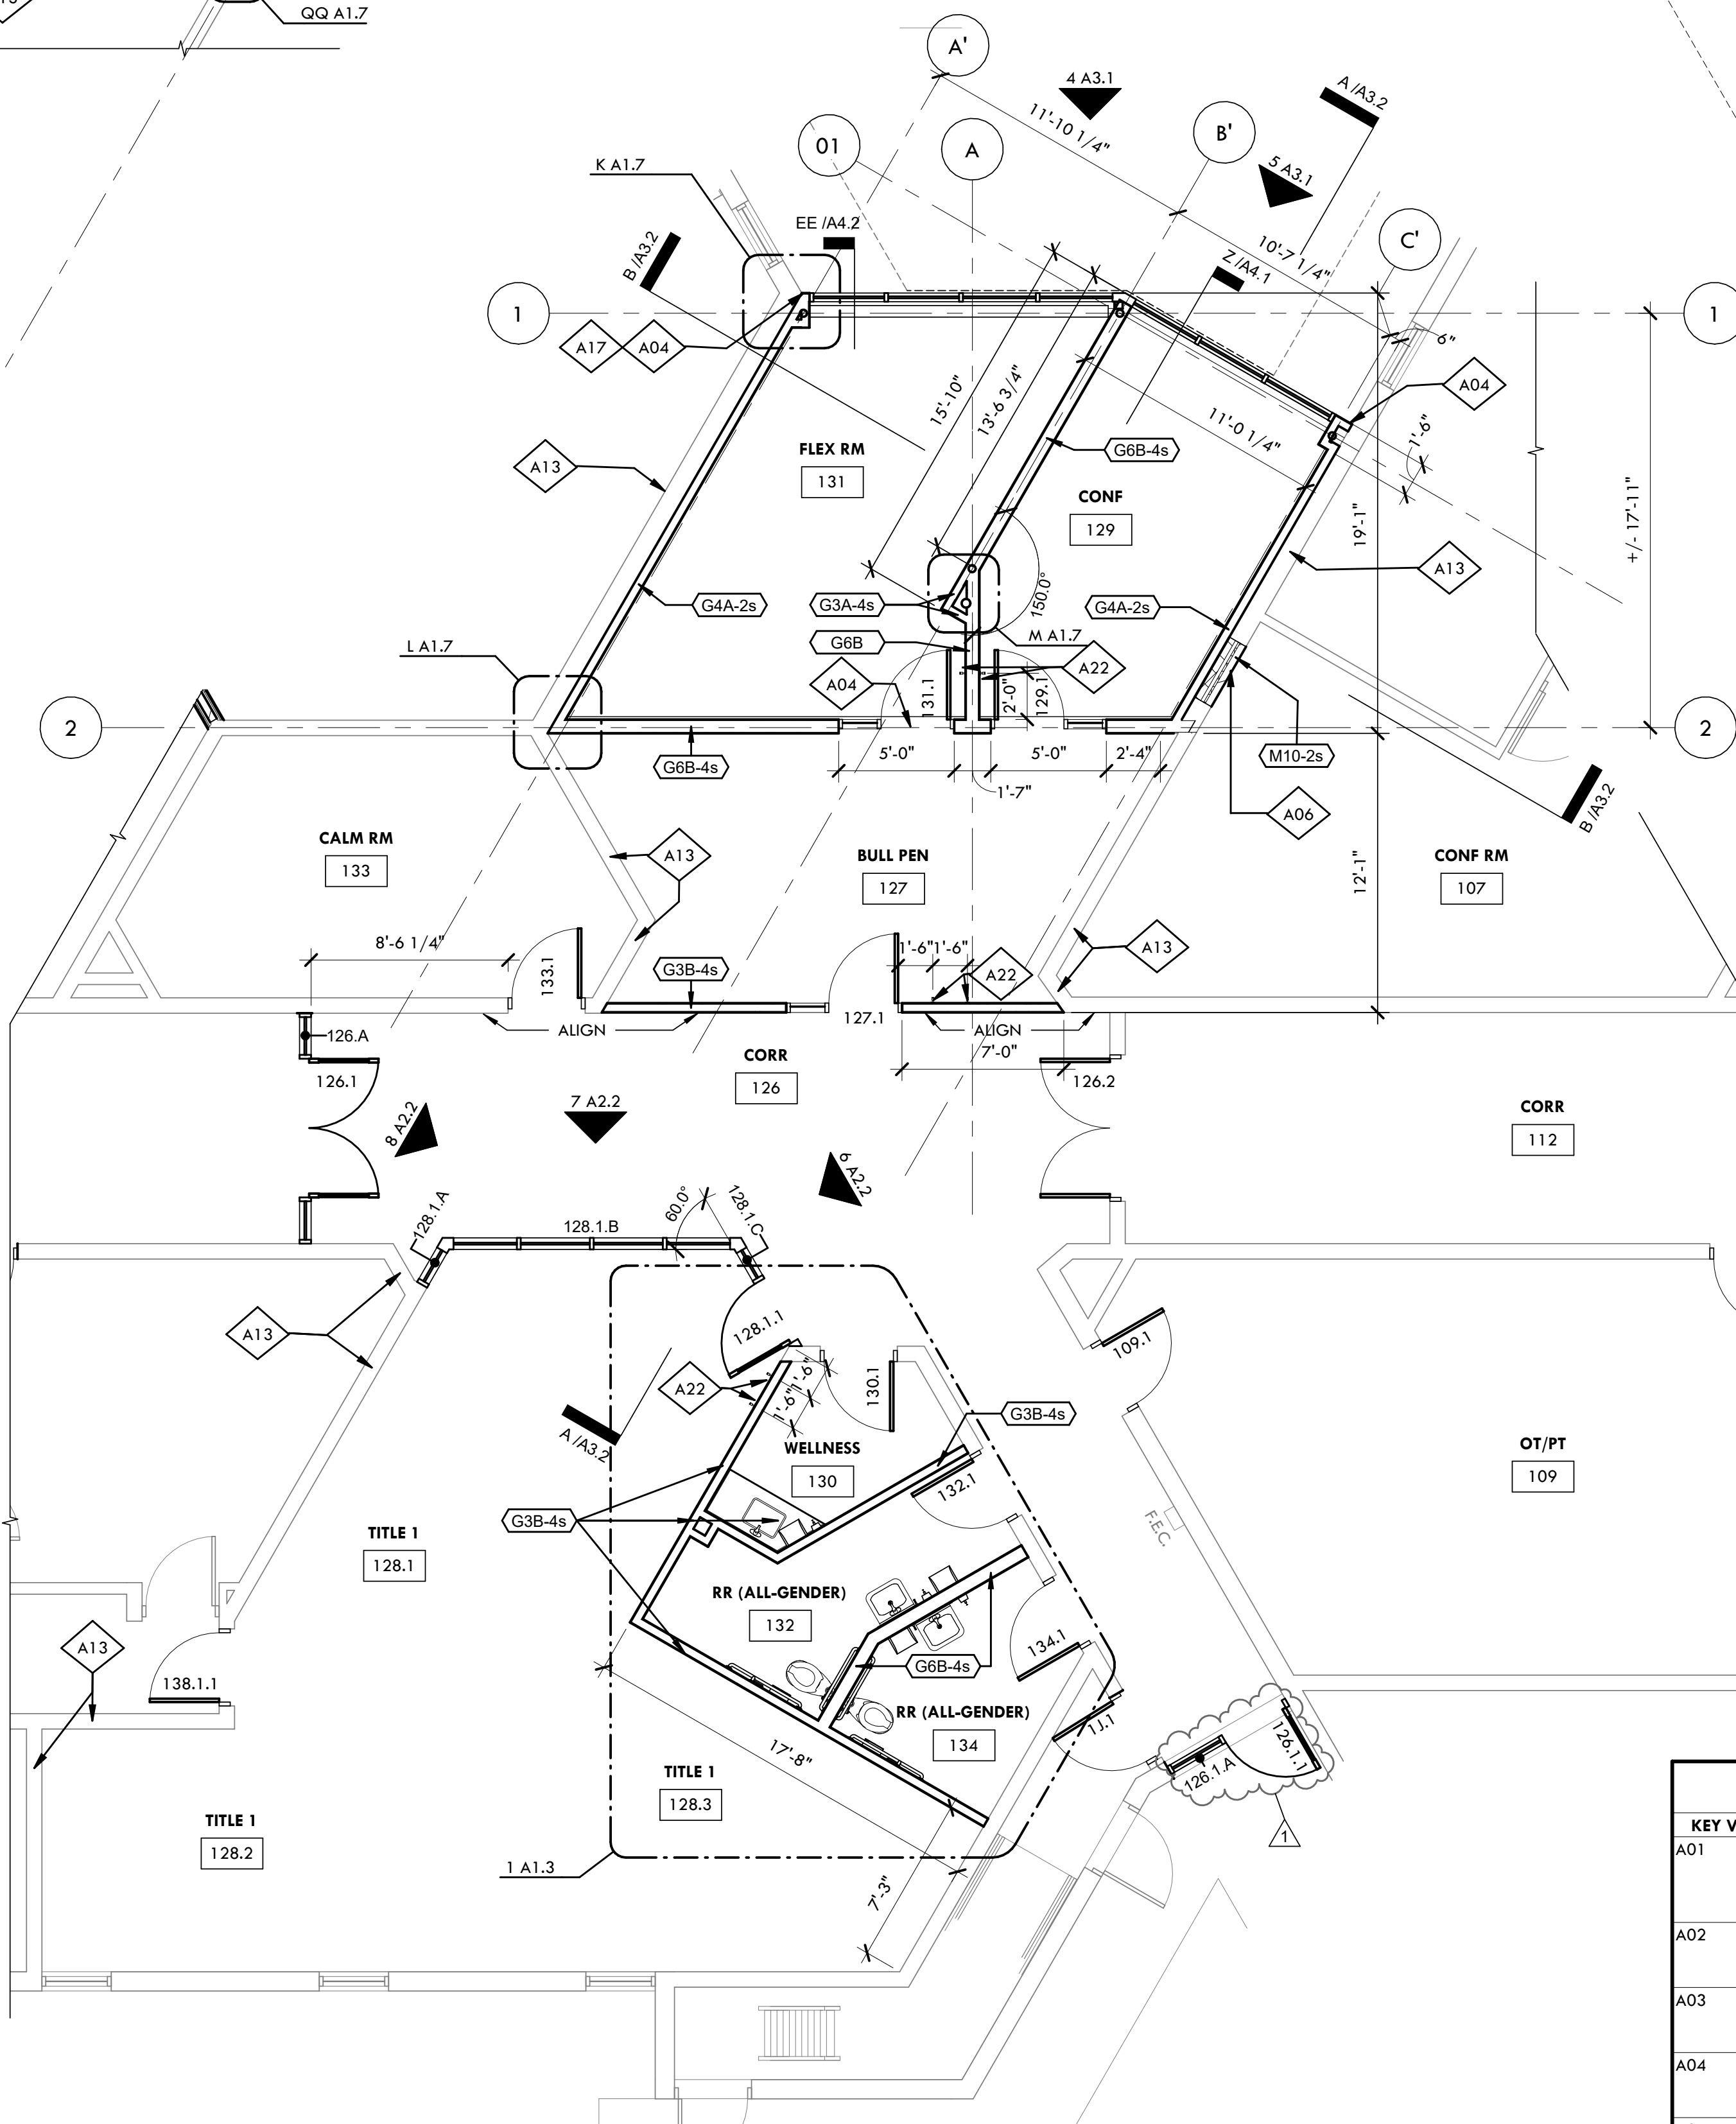

3 ENLARGED PLAN - ADDITION 1 & CORE OFFICES
SCALE: 3/16" = 1'-0"

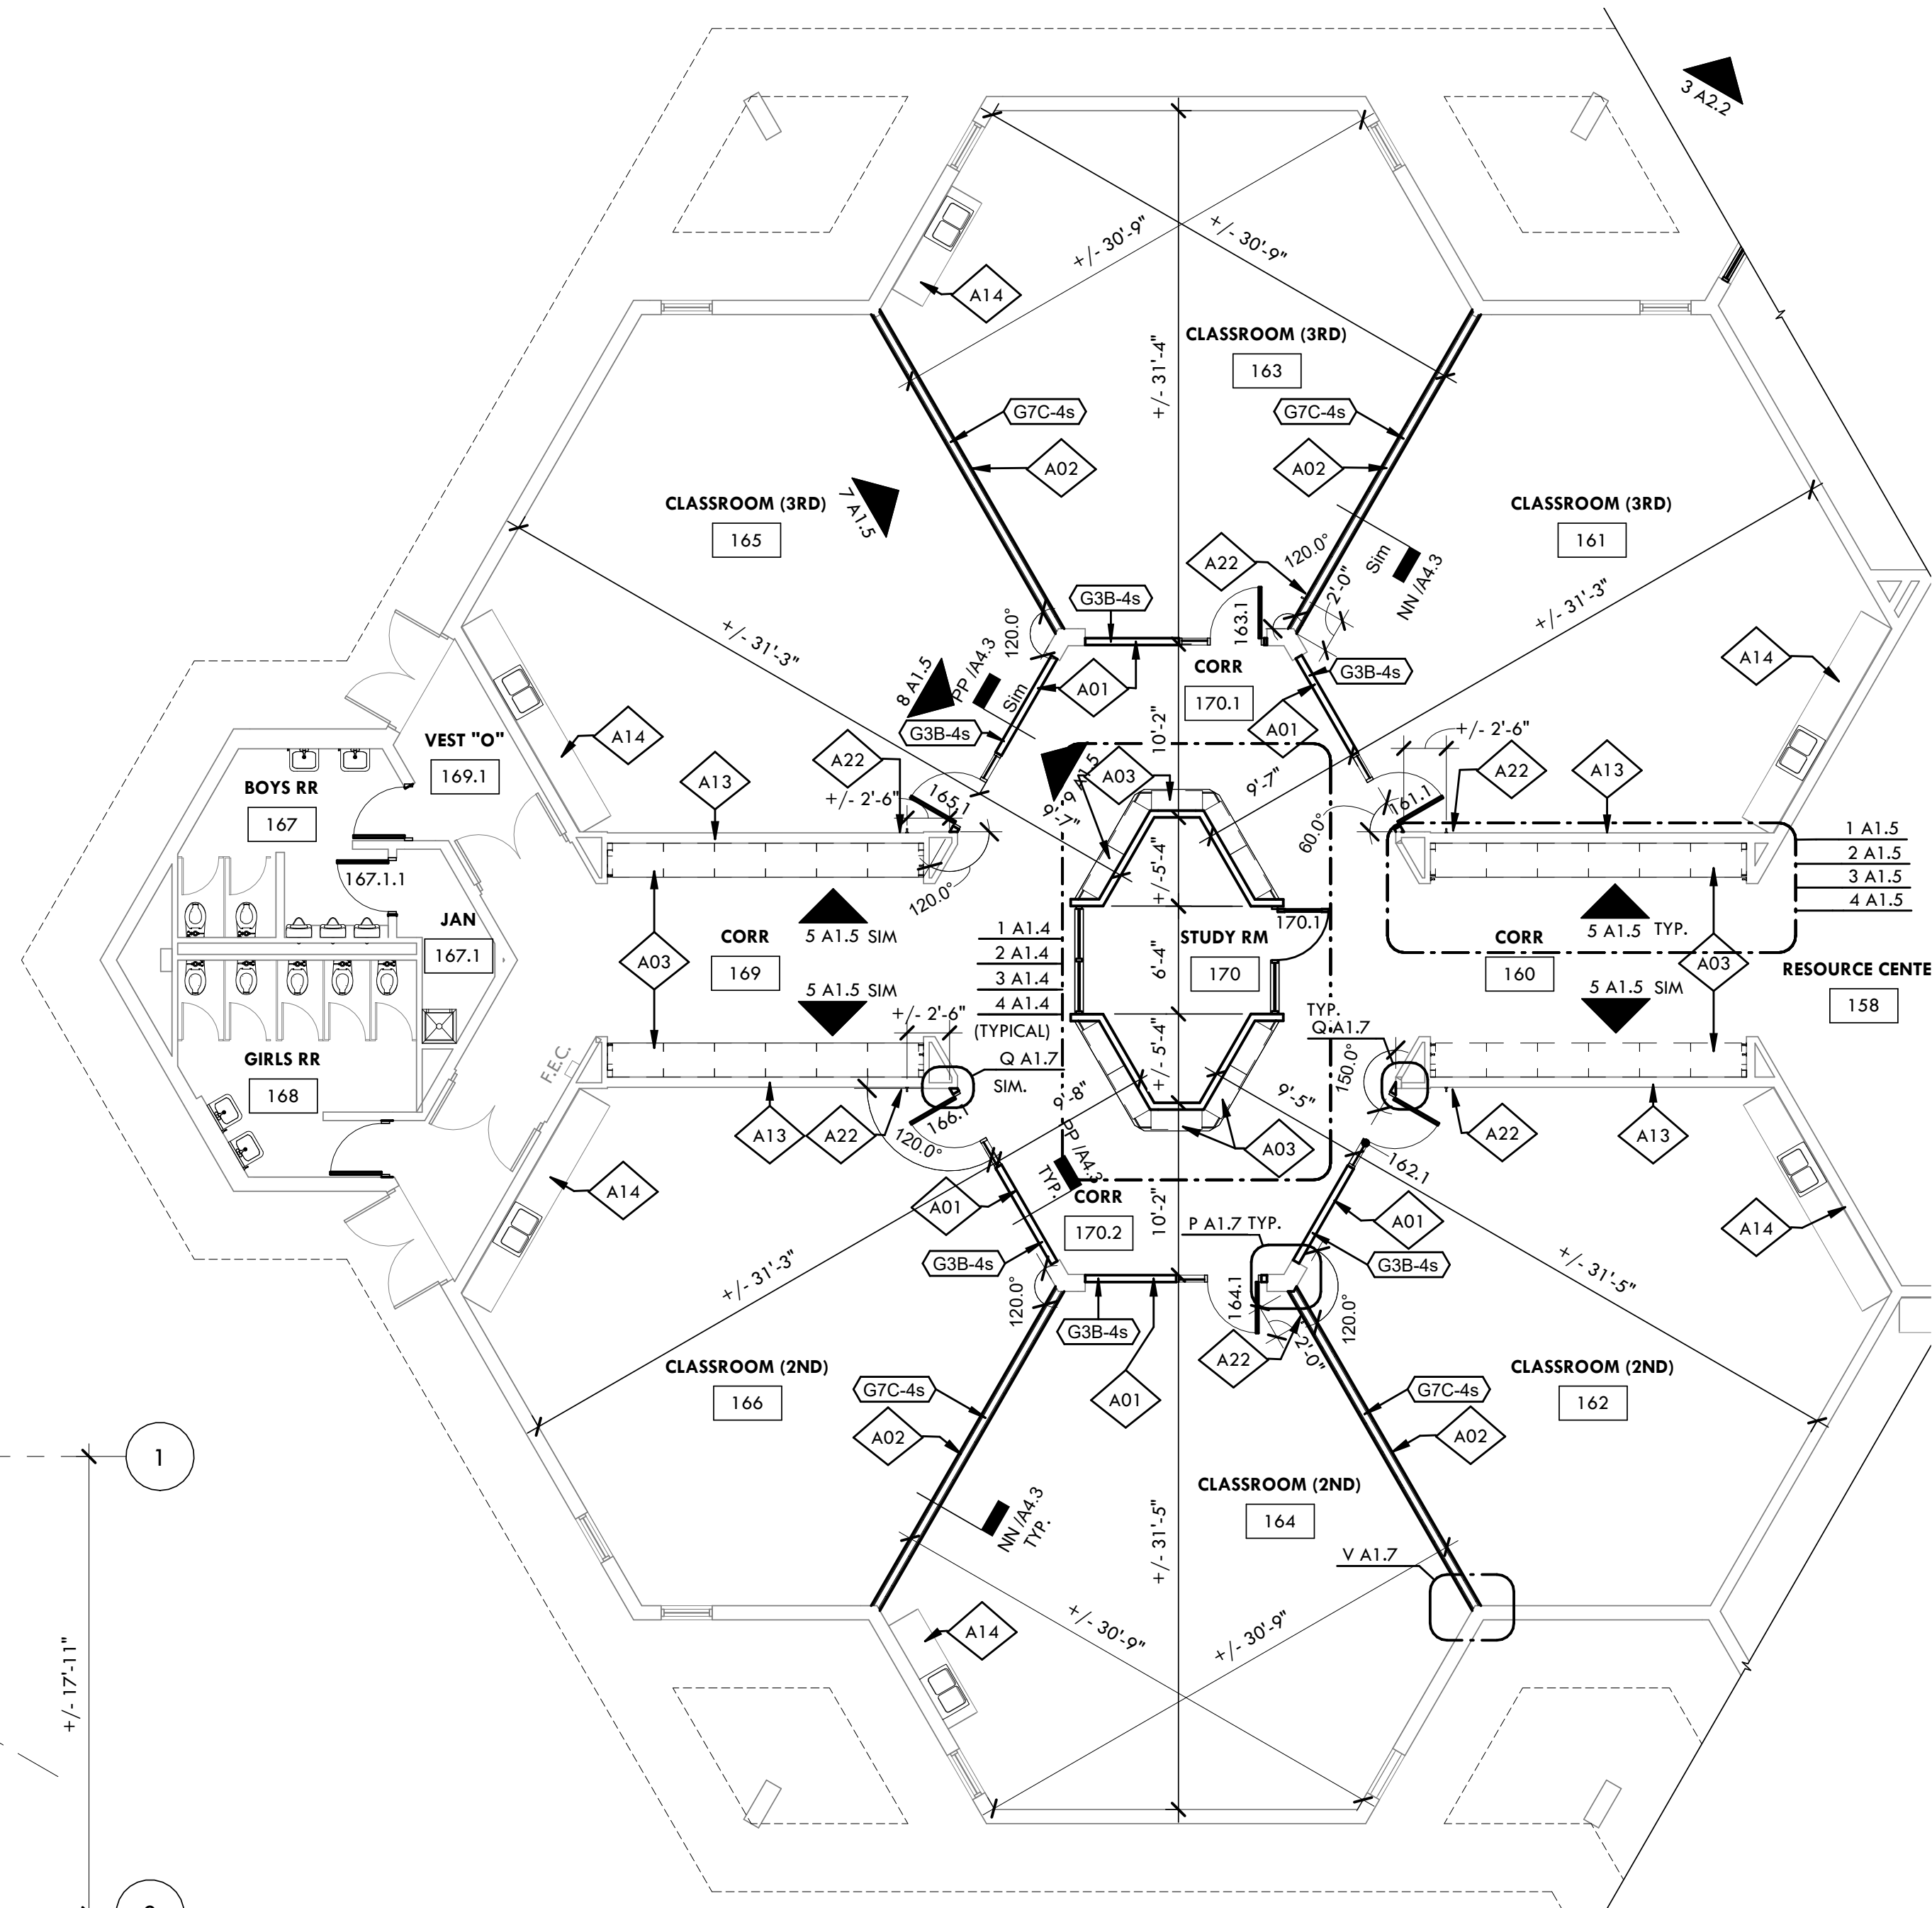

2 ENLARGED PLAN - CLASSROOM CLUSTER (TYPICAL OF 3)
SCALE: 1/8" = 1'-0"



GENERAL NOTES - FLOOR PLAN

- DIMENSIONS ON FLOOR PLAN ARE BASED ON FACE OF FINISHED WALL TO FACE OF FINISHED WALL (NOMINAL).
- VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE. PORTIONS OF EXISTING CONSTRUCTION MAY HAVE BEEN REMOVED BY OWNER.
- MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE WITH OWNER ANY DISRUPTION IN SERVICES REQUIRED TO PERFORM WORK OR TO MODIFY EXISTING PIPING, DUCTWORK OR ANY ASSOCIATED EQUIPMENT.
- REFER TO SHEET A2.1 FOR ROOM FINISH SCHEDULE AND NOTES.
- REFER TO SHEET A2.2 FOR OPENING SCHEDULES, DETAILS AND NOTES.

GENERAL LEGEND


NOTE: HATCH PATTERNS FOR THIS SHEET ONLY

- NOT IN CONTRACT (N.I.C.)
- PHASE MATCH LINE

KEYNOTE LEGEND

KEY VALUE	KEYNOTE TEXT
A01	ALIGN FINISH FACE OF NEW WALL WITH THE FINISH FACE OF EXISTING SOFFIT. REMOVE GWB FROM THE EXISTING SOFFIT FACE THAT IS IN ALIGNMENT WITH THE NEW WALL AND EXTEND NEW GWB OVER FACE OF EXISTING SOFFIT FRAMING. NEW GWB FACE FINISH WITH A SMOOTH LEVEL 4 SURFACE FOR PAINT.
A02	INSTALL INDICATED WALL AND FINISHES CENTERED ON A LINE BETWEEN THE INSIDE CORNER OF EXTERIOR WALL AND THE OUTSIDE CORNER OF THE BRICK STRUCTURAL WALL THAT SHAPE EACH CLASSROOM.
A03	INSTALL CONCRETE CURB BASE, MILLWORK, SHELF, AND UPPER CABINETS AS INDICATED. REFER TO ENLARGED PLAN, INTERIOR ELEVATIONS AND DETAILS ON SHEETS A5.3 AND A5.4 FOR FURTHER INFORMATION.
A04	INSTALL 1/2" CONSTRUCTION JOINTS AT EVERY VERTICAL OR HORIZONTAL JOINT OF ADDITION CONSTRUCTION TO EXISTING BUILDING. TO INCLUDE BUT NOT LIMITED TO THE JOINTS BETWEEN SLABS, WALLS, AND ROOF ASSEMBLIES.
A05	CONCRETE WALKWAY, SEE SHEET C2.0 FOR MORE INFORMATION.
A06	INFILL PREVIOUS OPENING WITH EXTERIOR WALL. MATCH EXTERIOR AND INTERIOR FINISHES TO ADJACENT WALLS.
A07	INSTALL SEMI RECESSED FIRE EXTINGUISHER CABINET AND FIRE EXTINGUISHER WHERE INDICATED.
A08	CONCRETE STOOP, SEE SHEET S1.01 FOR MORE INFORMATION.
A13	WALL TO REMAIN. PROTECT DURING CONSTRUCTION.
A14	MILLWORK TO REMAIN. PROTECT DURING CONSTRUCTION.
A17	ALIGN EXTERIOR WALL FACE WITH CORNER OF EXISTING BUILDING.
A22	INSTALL HOOK AT 4'-0" AFF IN LOCATION(S) INDICATED. DO NOT INSTALL ON BRICK SURFACE. PROVIDE ALL REQUIRED BLOCKING IN WALL AND PATH/PAINT WALL TO MATCH ADJACENT FINISHES. IF LOCATION INDICATED IS NOT POSSIBLE COORDINATE LOCATION WITH OWNER AND ARCHITECT. SPECIFICATION: ULINE H-10680-HAT AND COAT HOOKS, FOR TOTAL QTY REQUIRED SEE BREAKDOWN IN KEYNOTE A12 ON SHEET A1.4/A1.5.

KEY PLAN

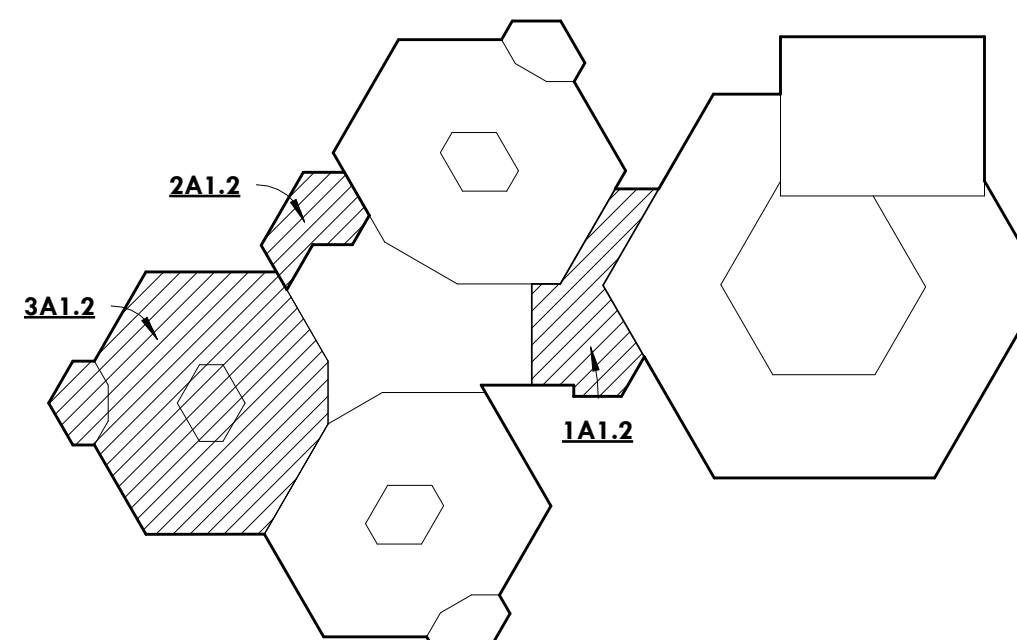

ENLARGED PLANS

CARLSON ELEMENTARY SCHOOL ADDITIONS & RENOVATION - RPS 2602

ROCKFORD PUBLIC SCHOOLS DISTRICT #205

4015 PEPPER DR, ROCKFORD, IL 61114

COPYRIGHT 2025
All drawn and written information appearing herein shall not be duplicated, disclosed, or otherwise used without the written consent of Larson & Darby Group


DATE:	02/19/2026	ISSUED FOR:	DATE:	02/19/2026
PROJECT NUMBER	2025-166	ISSUE FOR BID	02/19/2026	
SHEET NUMBER	A1.2	ADDENDUM #1	03/10/2026	

PROGRESS PRINT
Not For Construction
Date: 3/10/2026
11:02:20 AM
Larson & Darby Group
Architecture Engineering Interiors

Larson & Darby Group
Architecture Engineering Interiors


SCHEDULE - ROOM FINISH																	ROOM FINISH NOTES	
ROOM NUMBER	ROOM NAME	FLOOR FINISH	BASE FINISH	N. WALL FINISH	S. WALL FINISH	E. WALL FINISH	W. WALL FINISH	N.E. WALL FINISH	S.E. WALL FINISH	N.W. WALL FINISH	S.W. WALL FINISH	CEILING MATERIAL	CEILING FINISH	CABINETY	COUNTER	ROLLER SHADES		
1J	STAIR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-		
1K	STAIR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-		
100	LOBBY	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-		
100.1	VEST "B" ENTRY	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-		
100.2	VEST "B" EXIT	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-		
101	MAIN OFF	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	RS3		
102	GYMNASIUM	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-		
102.1	PE OFF	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	RS3		
103	AP	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	RS3		
104	CORR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-		
105	NURSE	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	RS3		
105.1	RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-		
106	PRINCIPAL	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	RS3		
107	CONF RM	PATCH TO MATCH EXISTING	MATCH EXISTING	-	EX	-	-	EX	EX	MATCH EXISTING	EX	ACP2	-	-	-	RS3		
108	STOR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-		
109	OI/PT	LVT1	WB1	P1	P3	P1	P1	-	N.J.C.	N.J.C.	N.J.C.	ACP1	-	-	-	-	RS3	
110	CORR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-		
111	ART	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	RS3	
111.1	STOR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
112	CORR	EX	EX	EX	EX	-	EX	-	-	-	-	ACP1	-	-	-	-	-	
113	MUSIC	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	RS3	
113.1	STOR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
114	PE STOR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-	-	
115	GIRLS RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
116	CAFETERIA	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
116.1	CORR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
116.2	CORR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
117	BOYS RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
118	STOR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
119	RECEIVING	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
120	CORR "H"	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
120.1	CORR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
121	KITCHEN	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-	-	
123	STOR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2	-	-	-	-	-	
125	STOR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
126	CORR	LVT1	WB1	EX/P1/WP1	-	EX	EX	-	-	-	-	ACP1	-	-	-	-	-	
126.1	CORR "T"	CPT12	-	EX	EX	EX	EX	-	-	-	-	ACP1	-	-	-	-	-	
127	BULL PEN	CPT11	WB1	P4/WP4	P1/WP1	EX	EX	-	-	-	-	ACP3	-	-	-	-	RS3	
128.1	TITLE 1	CPT11	WB1	GLAZING	-	-	EX	GLAZING	P3/WP3	EX	-	ACP3	-	-	-	-	RS2	
128.2	TITLE 1	CPT11	WB1	P1	P1	-	P1	-	-	-	-	ACP3	-	-	-	-	-	
128.3	TITLE 1	CPT11	WB1	-	P1	-	-	P4/WP4	P1	-	-	ACP3	-	-	-	-	-	
129	CONF	CPT11	WB1	-	P1/WP1	-	P1/WP1	P1/WP1	P2/WP2	P1/WP1	-	ACP3	-	-	-	-	RS1/RS3	
130	WELLNESS	LVT1	WB1	P1/WP1	-	-	-	P1/WP1	P1/WP1	P1/WP1	P1/WP1	ACP3	-	-	-	-	SSM1	
131	FLEX RM	WB1	CPT11	P1/WP1	P1/WP1	P1/WP1	P3/WP3	-	-	-	-	ACP3	-	-	-	-	RS1/RS3	
132	RR (ALL-GENDER)	PORC1	MC1/CT2	CT1	CT1	CT1	CT1	CT1	CT1	CT1	CT1	ACP4	-	-	-	-	-	
133	CALM RM	EX	EX	EX	EX	-	-	EX	EX	EX	EX	ACP1	-	-	-	-	RS3	
134	RR (ALL-GENDER)	PORC1	MC1/CT2	CT1	CT1	CT1	CT1	CT1	CT1	CT1	CT1	ACP4	-	-	-	-	-	
135	CORR	EX	EX	EX	EX	-	EX	-	-	-	-	ACP1	-	-	-	-	-	
136	PTO	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
136.1	IT RM	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
137	WOMENS RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
138	STAFF LOUNGE	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
138.1	CORR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
139	MENS RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
140	CORR	LVT1	-	WP1/WP4	WP1/WP4	-	-	-	-	-	-	ACP3	-	-	-	PL1	PL1	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS
141	CLASSROOM (KINDER)	PATCH TO MATCH EXISTING	WB1	P1/WP1	EX	-	-	P1/WP1	EX	EX	EX	ACP3	-	-	-	-	RS3	
142	CLASSROOM (1ST)	PATCH TO MATCH EXISTING	WB1	P1/WP1	EX	-	-	P1/WP1	EX	EX	EX	ACP3	-	-	-	-	RS3	
143	CLASSROOM (KINDER)	PATCH TO MATCH EXISTING	WB1	P1/WP1	EX	-	-	EX	EX	P1/WP1	P1/WP1	ACP3	-	-	-	-	RS3	
144	CLASSROOM (1ST)	PATCH TO MATCH EXISTING	WB1	EX	P1/WP1	-	-	P1/WP1	P1/WP1	EX	EX	ACP3	-	-	-	-	RS3	
145	CLASSROOM (KINDER)	PATCH TO MATCH EXISTING	WB1	EX	P1/WP1	-	-	EX	EX	EX	P1/WP1	ACP3	-	-	-	-	RS3	
146	CLASSROOM (1ST)	PATCH TO MATCH EXISTING	WB1	EX	P1/WP1	-	-	EX	EX	EX	P1/WP1	ACP3	-	-	-	-	RS3	
147	BOYS RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
147.1	JAN	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
148	GIRLS RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
149	CORR	LVT1	-	WP1/WP4	WP1/WP4	-	-	-	-	-	-	ACP3	-	-	-	PL1	PL1	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS
149.1	CORR "R"	CPT12	-	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP3	-	-	-	-	-	
149.2	CORR "Q"	CPT12	-	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP3	-	-	-	-	-	
150	STUDY RM	CPT11	WB1	P1/WP1	P4/WP4	GLAZING	GLAZING	P1/WP1	P1/WP1	P1/WP1	P4/WP4	ACP3	-	-	-	-	RS2	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS
150.1	CORR	LVT1	WB1	P1/WP5	P1/WP1/WP4	-	-	P1/WP5	P1/WP1/WP4	P1/WP5	P1/WP1/WP4	ACP3	-	-	-	PL1	PL1	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS
150.2	CORR	LVT1	WB1	P1/WP1/WP4	P1/WP5	-	-	P1/WP1/WP4	P1/WP5	P1/WP1/WP4	P1/WP5	ACP3	-	-	-	PL1	PL1	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS
151	SPED	CPT11	WB1	P1/WP1	P1/WP1	-	P1/WP1	P2/WP2	P2/WP2	-	-	ACP3	-	-	-	-	RS1/RS3	
152	CORR	LVT1	WB1	P1/WP1	-	-	-	-	-	P1/WP1	P1/WP1	ACP3	-	-	-	-	-	
152.1	VEST "P"	CPT12	WB1	-	-	-	-	P1/WP1	P1/WP1	-	-	ACP3	-	-	-	-	-	
153	SPED	CPT11	WB1	P1/WP1	P1/WP1	P1/WP1	P1/WP1	P4/WP4	-	-	-	ACP3	-	-	-	-	RS1/RS3	
154	CORR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2/EX. GWB	-	-	-	-	-	
155	ESL	CPT11	WB1	-	-	-	-	P1/WP1	P1/WP1	P1/WP1	-	ACP1	-	-	-	-	RS1/RS3	
155.1	CLOSET	CPT11	WB1	-	P1/WP1	P1/WP1	P1/WP1	-	-	-	-	ACP1	-	-	-	-	-	
156	COMP LAB	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2/EX. GWB	-	-	-	-	-	
157	STOR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
158	RESOURCE CENTER	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP2/EX. GWB	-	-	-	-	-	
159	SPEECH	EX	EX	-	EX	-	-	EX	EX	P1	EX	ACP1	-	-	-	-	RS1/RS3	
160	CORR	LVT1	-	WP1/WP3	WP1/WP3	-	-	-	-	-	-	ACP3	-	-	-	PL1	PL1	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS
161	CLASSROOM (3RD)	PATCH TO MATCH EXISTING	WB1	EX	EX	-	-	EX	EX	P1/WP1	P1/WP1	ACP3	-	-	-	-	RS3	
162	CLASSROOM (2ND)	PATCH TO MATCH EXISTING	WB1	EX	EX	-	-	EX	EX	P1/WP1	P1/P1	ACP3	-	-	-	-	RS3	
163	CLASSROOM (3RD)	PATCH TO MATCH EXISTING	WB1	EX	P1/WP1	-	-	EX	P1/WP1	EX	P1/WP1	ACP3	-	-	-	-	RS3	
164	CLASSROOM (2ND)	PATCH TO MATCH EXISTING	WB1	P1/WP1	EX	-	-	P1/WP1	EX	P1/WP1	EX	ACP3	-	-	-	-	RS3	
165	CLASSROOM (3RD)	PATCH TO MATCH EXISTING	WB1	EX	EX	-	-	P1/WP1	P1/WP1	EX	EX	ACP3	-	-	-	-	RS3	
166	CLASSROOM (2ND)	PATCH TO MATCH EXISTING	WB1	EX	EX	-	-	P1/WP1	P1/WP1	EX	EX	ACP3	-	-	-	-	RS3	
167	BOYS RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
167.1	JAN	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
168	GIRLS RR	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	N.J.C.	N.J.C.	-	-	-	-	
169	CORR	LVT1	-	WP1/WP3	WP1/WP3	-	-	-	-	-	-	ACP3	-	-	-	PL1	PL1	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS
169.1	VEST "O"	CPT12	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	ACP1	-	-	-	-	-	
169.2	VEST "N"	CPT12	N.J.C.	N.J.C.	N.J.C.	N.J.C.	N.J.C.	-	-	-	-	ACP1	-	-	-	-	-	
170	STUDY RM	CPT11	WB1	P1/WP1	P3/WP3	GLAZING	GLAZING	P1/WP1	P1/WP1	P1/WP1	P3/WP3	ACP3	-	-	-	-	RS2	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS
170.1	CORR	LVT1	WB1	P1/WP5	P1/WP1/WP3	-	-	P1/WP5	P1/WP1/WP3	P1/WP5	P1/WP1/WP3	ACP3	-	-	-	PL1	PL1	REFER TO 2/A1.2 FOR COMPASS ORIENTATION OF SPACE; REFER TO 5/A1.5 FOR FINISH LOCATIONS

DOOR FRAME TYPES

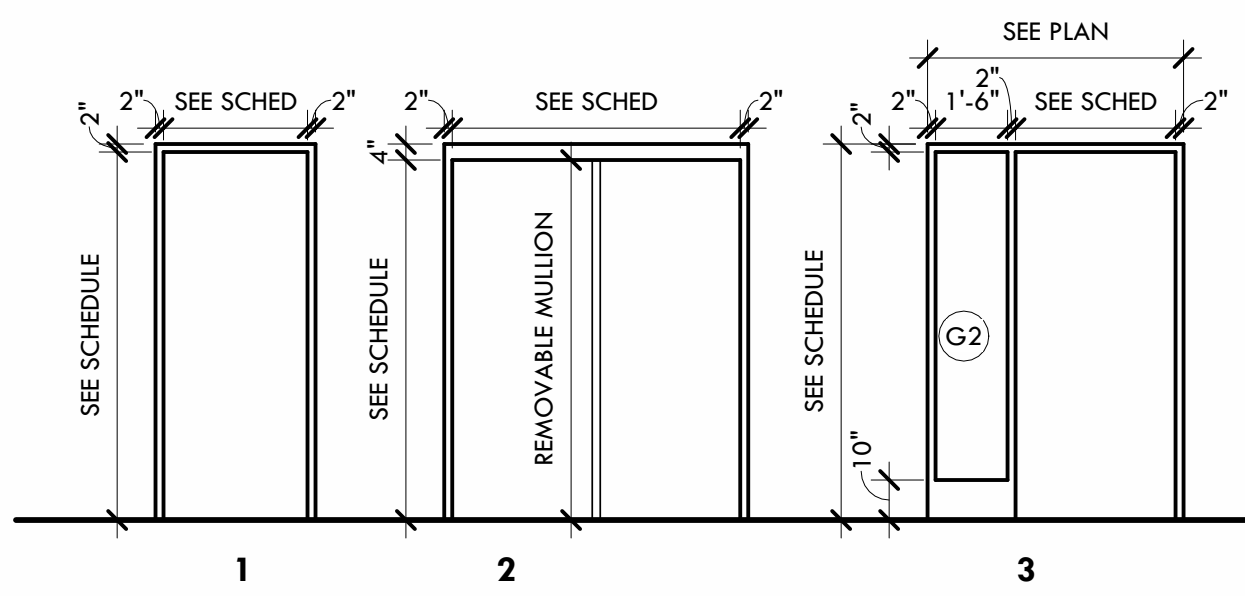


DOOR TYPES

SEE SCHEDULE FOR DOOR PAIR DESIGNATION

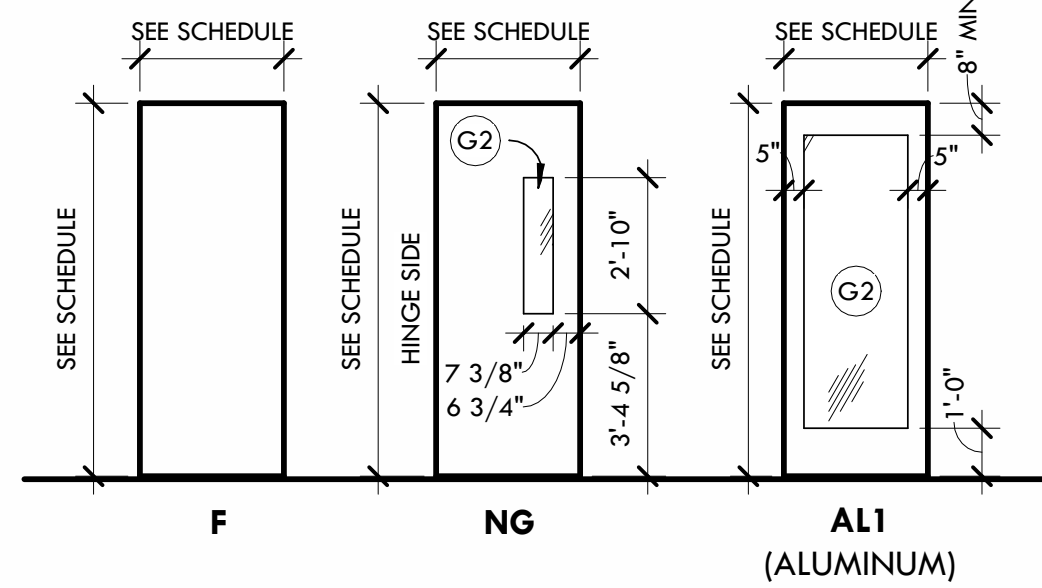


EXTERIOR STOREFRONT TYPES

ALL EXTERIOR STOREFRONT TO BE ANOD2, 4.5" #40 DARK BRONZE ANDIZED ALUM.

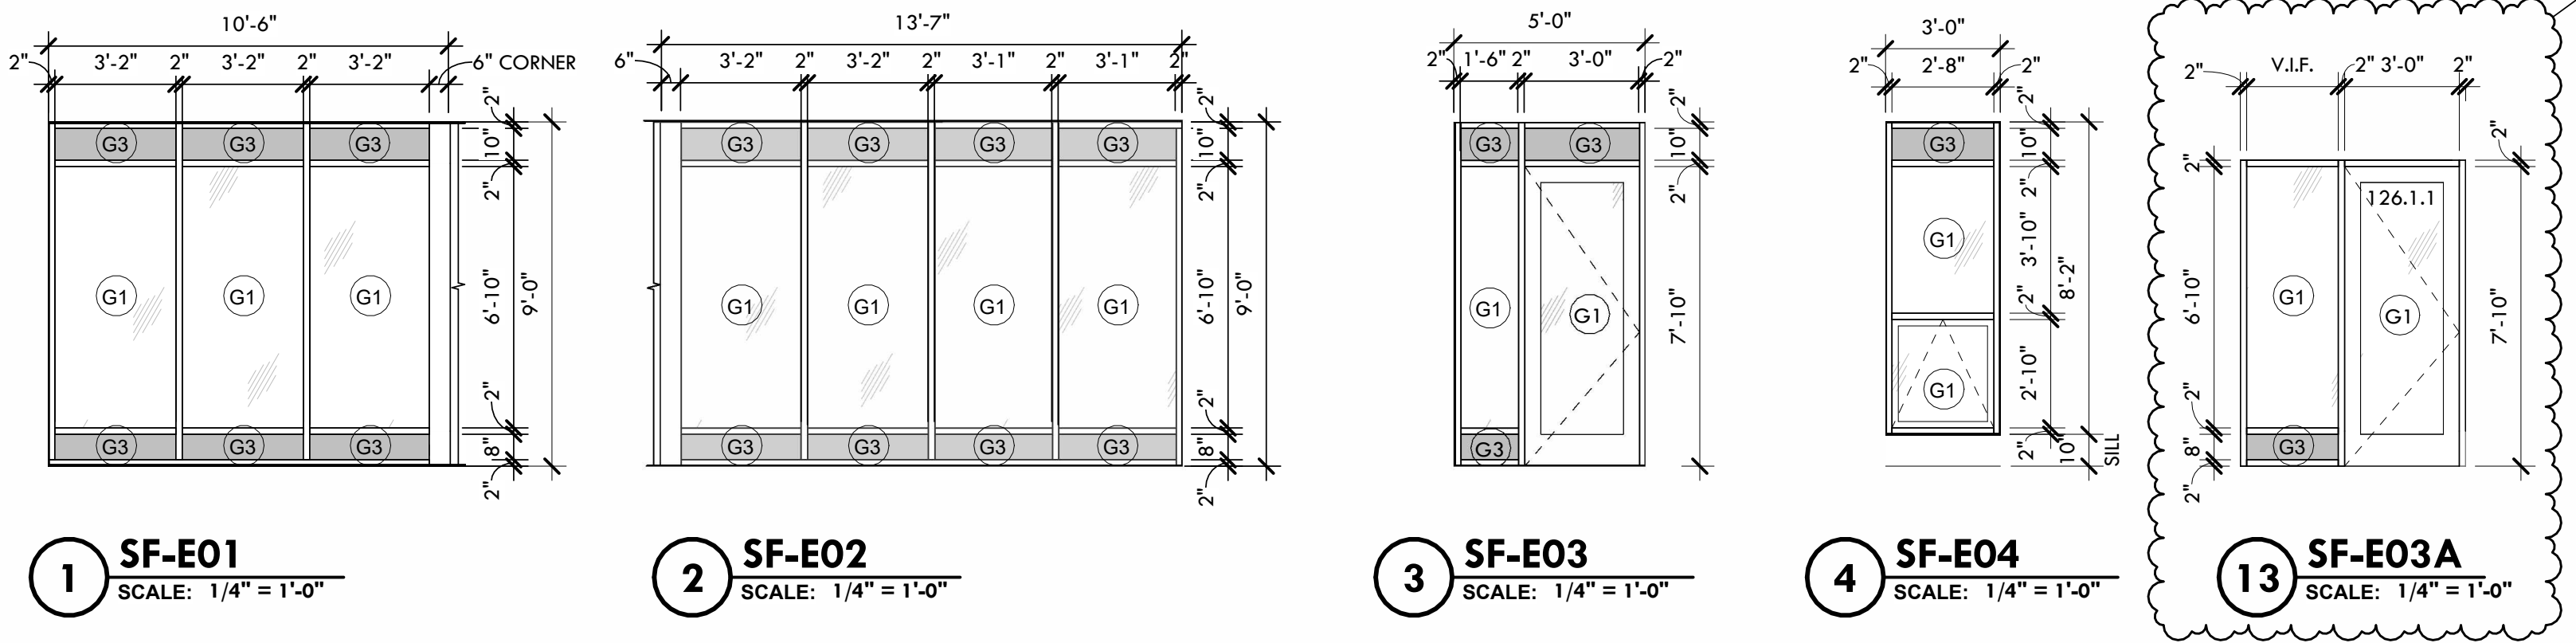


INTERIOR STOREFRONT TYPES

ANOD1, 4.5" CENTER GLAZED ALUM. STOREFRONT

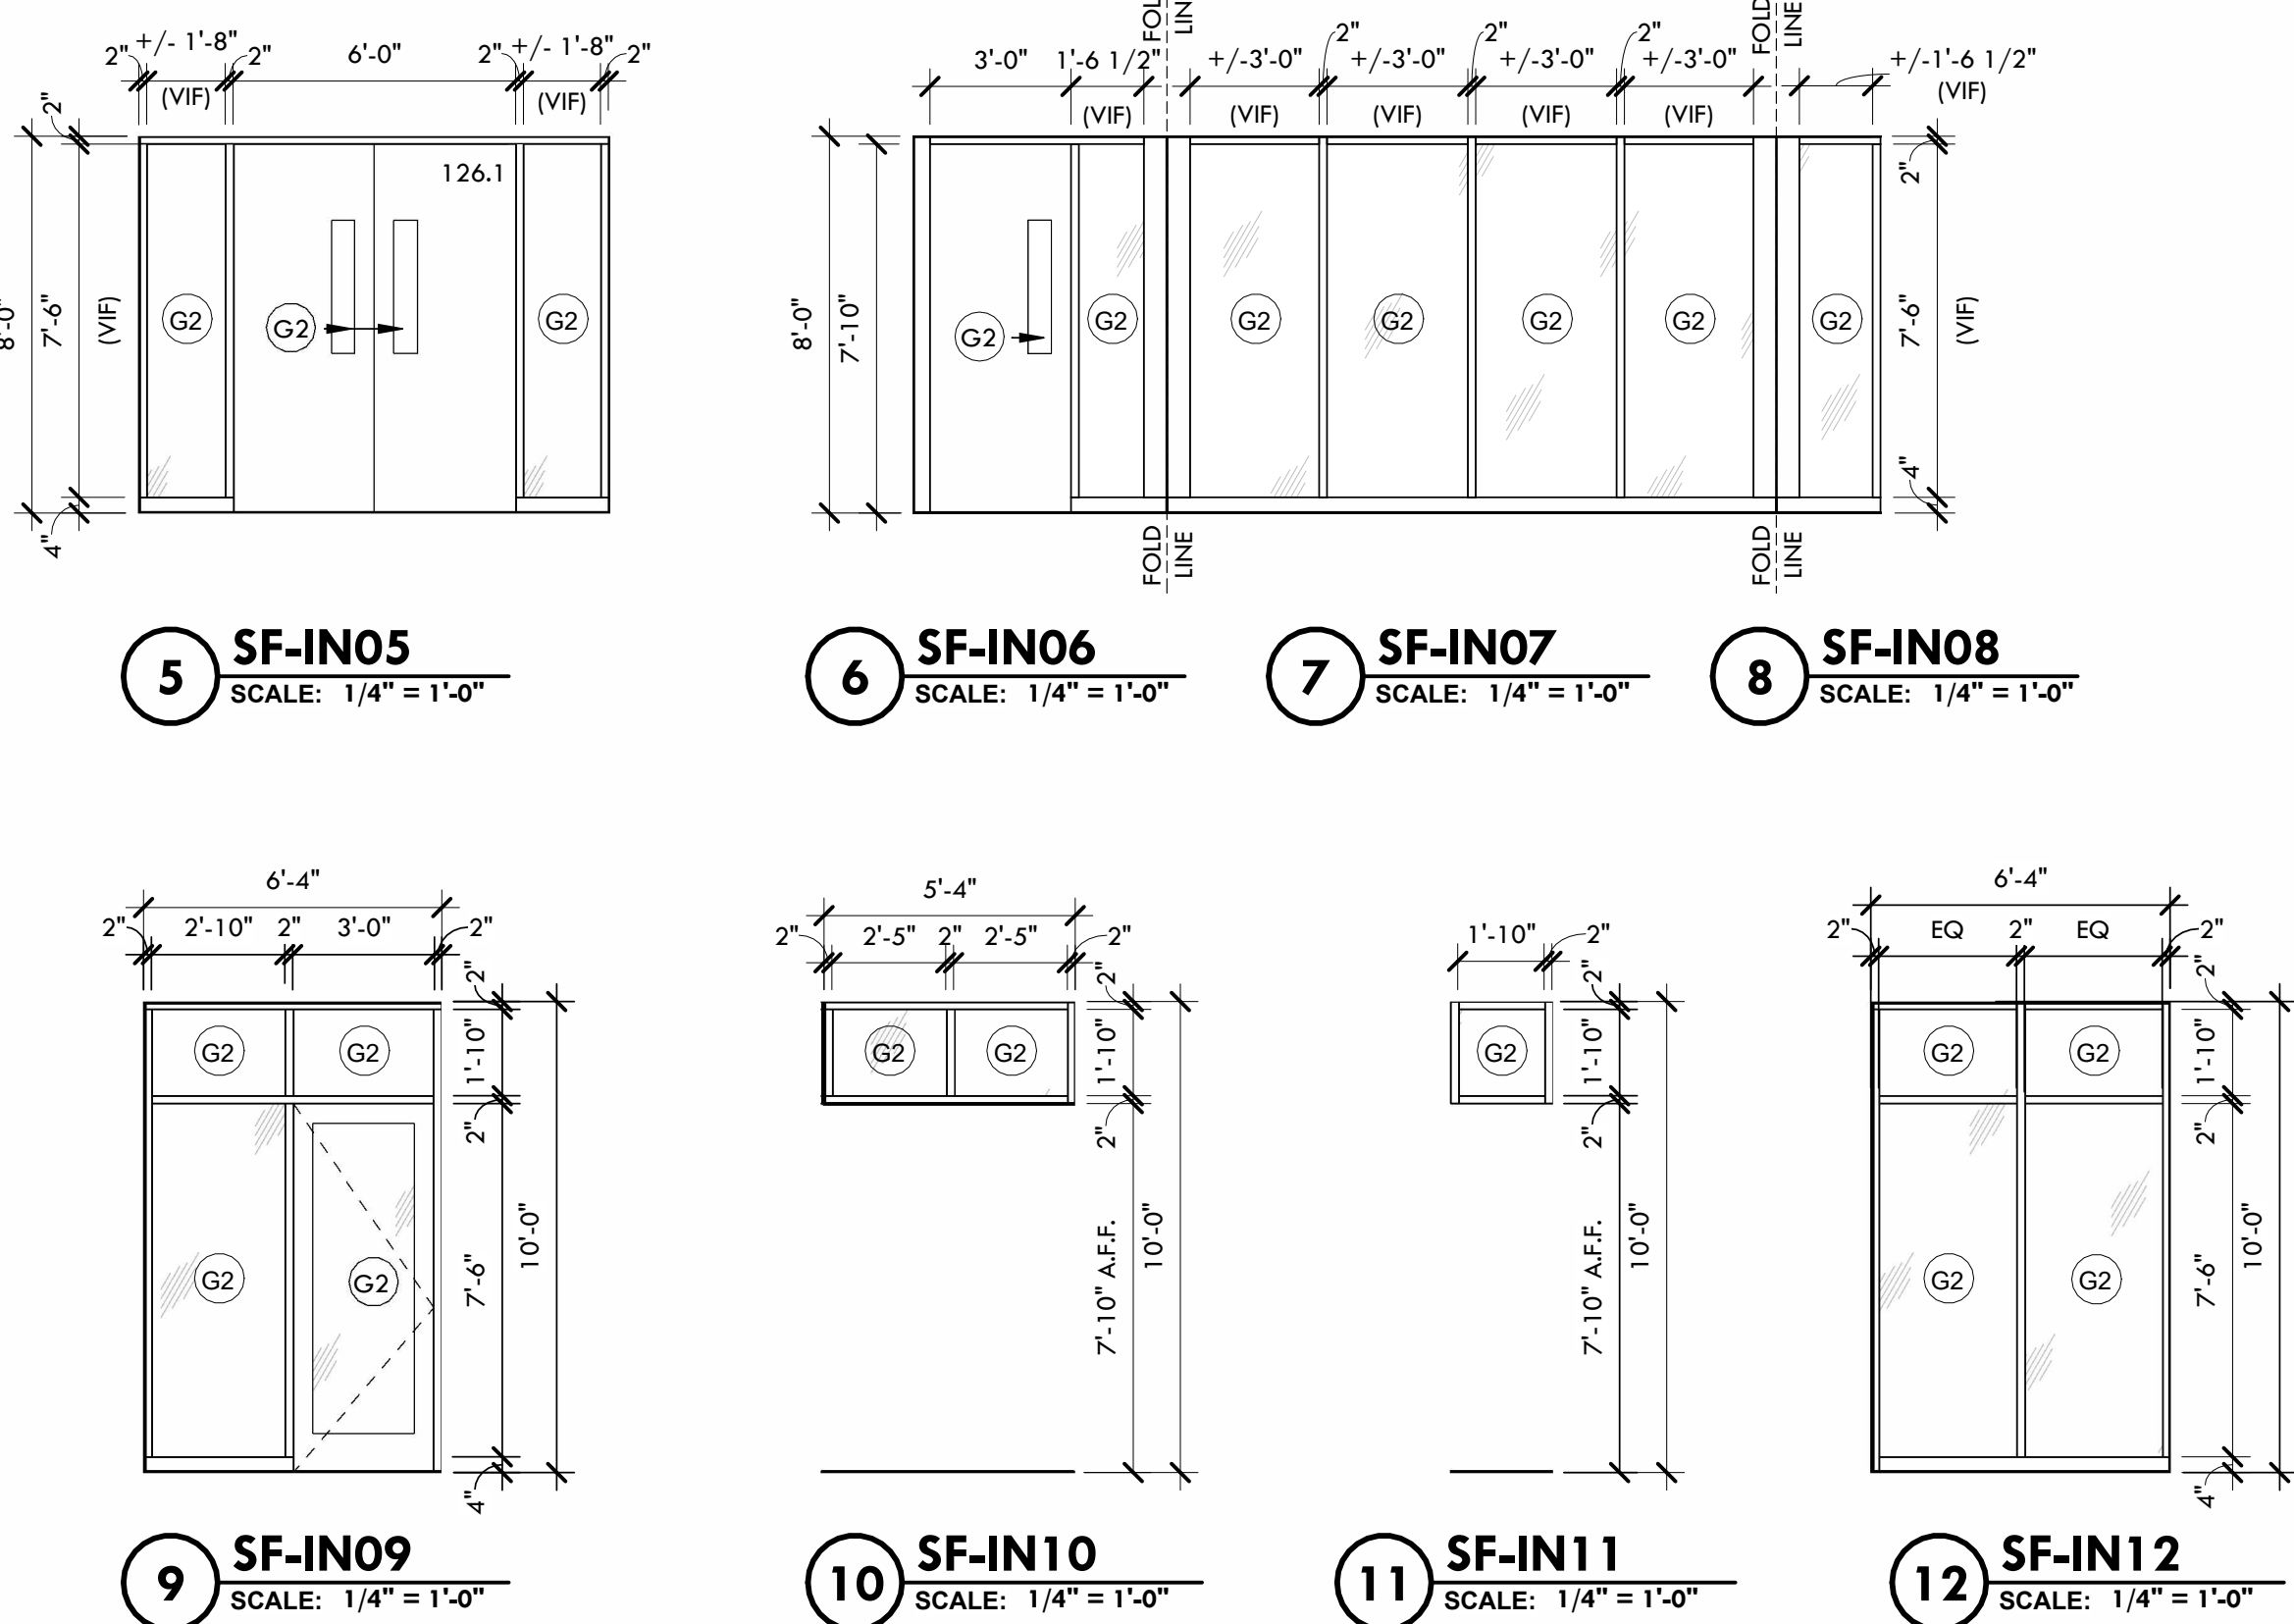


H1

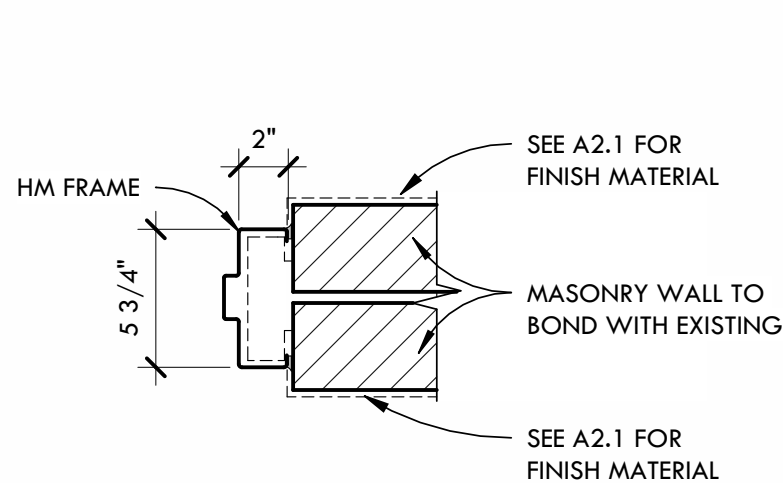


J1

H2

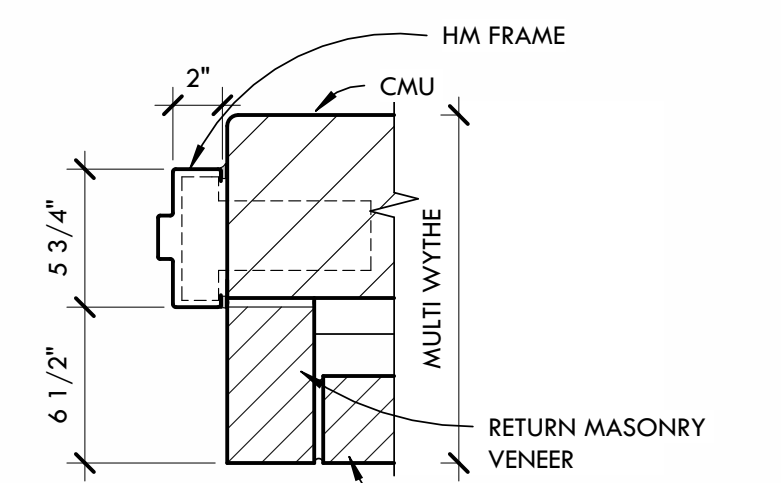

J2

J3

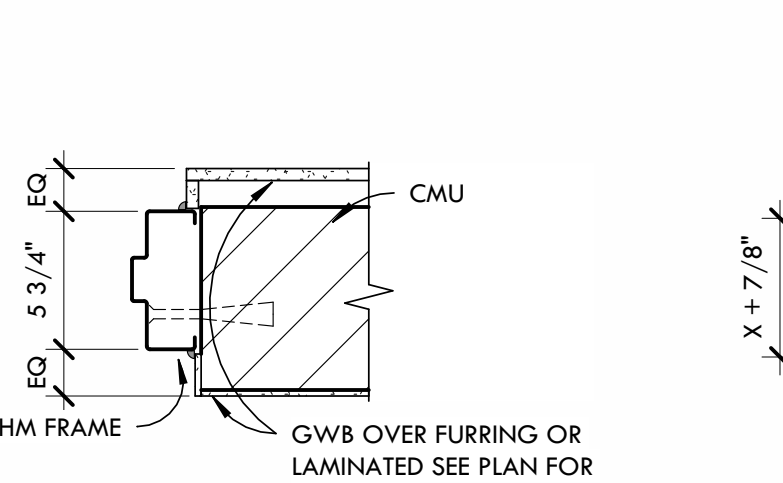

J4

J5

15 HEAD, JAMB, & SILL DETAILS

SCALE: 1 1/2" = 1'-0"

DOOR SCHEDULE

DOOR NUMBER	FRAME TYPE	FRAME MATERIAL	FRAME FINISH	DOOR TYPE	PANEL MATERIAL	PANEL FINISH	DOOR PAIR	WIDTH	HEIGHT	DETAILS	FIRE RATING	HARDWARE	GLAZING	COMMENTS	ALTERNATE PRICING
109.1	EXIST. (1)	EXIST. (HM)	P6	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		44 UTJ-IT	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS - ADD CARD READER	No
109.2	EXIST. (1)	EXIST. (HM)	P6	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		06 CL	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	Yes
111.1	EXIST. (3)	EXIST. (HM)	P8	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		06 CL	G2	RETROFIT FRAME AND REPLACE GLAZING AT SLAB AND SIDEITE & HARDWARE COMPONENTS, DOOR SLAB TO REMAIN	Yes
111.1.1	EXIST. (2)	EXIST. (HM)	P8	F	EXIST. (WD)	EXIST. (DK STAIN)	Yes	6'-0"	7'-10"	EXIST.		19 STO	-	RETROFIT FRAME AND REPLACE HARDWARE COMPONENTS	Yes
113.1	EXIST. (3)	EXIST. (HM)	P8	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		06 CL	G2	RETROFIT FRAME AND REPLACE GLAZING AT SLAB AND SIDEITE & HARDWARE COMPONENTS, DOOR SLAB TO REMAIN	Yes
113.1.1	EXIST. (2)	EXIST. (HM)	P8	F	EXIST. (WD)	EXIST. (DK STAIN)	Yes	6'-0"	7'-10"	EXIST.		19 STO	-	RETROFIT FRAME AND REPLACE HARDWARE COMPONENTS	Yes
114.1	EXIST. (1)	EXIST. (HM)	P8	F	EXIST. (WD)	EXIST. (DK STAIN)	Yes	6'-0"	7'-10"	EXIST.	YES	19F STO	-	20 MIN. DOOR AND HARDWARE - RETROFIT FRAME AND REPLACE HARDWARE COMPONENTS, DOOR SLAB TO REMAIN	Yes
118.1	EXIST. (1)	EXIST. (HM)	P8	F	EXIST. (WD)	EXIST. (DK STAIN)	No	2'-8"	7'-10"	EXIST.		23 STO	-	RETROFIT FRAME AND REPLACE HARDWARE COMPONENTS, DOOR SLAB TO REMAIN	Yes
118.1.1	EXIST. (1)	EXIST. (HM)	P8	F	EXIST. (WD)	EXIST. (DK STAIN)	Yes	6'-0"	7'-10"	EXIST.		40 UTJ	-	EXTERIOR DOOR PAIR - FRAME, SLAB, AND HARDWARE REPLACEMENT	Yes
126.1	EXIST. (1)	EXIST. (HM)	P6	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		06 CL	-	RETROFIT FRAME AND REPLACE HARDWARE COMPONENTS, DOOR SLAB TO REMAIN	Yes
126.1.1	SF-E03A	ALUM2	ANOD2	AL1	ALUM2	ANOD2	No	3'-0"	7'-10"	EXIST.		02 ED	G1	EXTERIOR DOOR - PANIC HARDWARE & CARD READER	Yes
126.1.2	EXIST. (1)	EXIST. (HM)	P6	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		28 COR	G2	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS - PANIC HARDWARE REQUIRED	No
127.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		07 CL	G2		No
128.1.1	EXIST. (SF)	EXIST. (HM)	P6	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		06 CL	G2	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	Yes
129.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
130.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		01 RR	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
131.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
132.1	1	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		01 RR	-	WIDEN EXISTING MASONRY DOOR OPENING, NEW DOOR FRAME, SLAB, AND HARDWARE COMPONENTS	No
133.1	EXIST. (1)	EXIST. (HM)	P6	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		06 CL	G2	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
134.1	1	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H1/11		01 RR	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
136.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		44 UTJ-IT	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
138.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		23 STO	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	Yes
138.1.1	EXIST. (1)	EXIST. (HM)	P6	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		06 CL	G2	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS, NOTE: 7'-0" H DOOR.	No
138.2	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		23 STO	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	Yes
141.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
142.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
143.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
144.1	3	HM	P6	G	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
145.1	3	HM	P6	G	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
146.1	3	HM	P6	G	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
147.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		02 RR-M	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
147.1.1	1	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H1/13		51 UTJ-CUS	-	NEW DOOR FRAME, SLAB & HARDWARE COMPONENTS IN EXISTING OPENING	Yes
148.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		02 RR-M	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
150.1	SF-IN09	ALUM1	ANOD1	AL1	ALUM1	ANOD1	No	3'-0"	7'-10"	H5/15		07 CL	G2	STOREFRONT	No
151.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
152.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		47 YES	G2		No
152.1.1	SF-E03	ALUM2	ANOD2	AL1	ALUM2	ANOD2	No	3'-0"	7'-10"	H11/111		32 EXD	G1	EXTERIOR DOOR - PANIC HARDWARE & CARD READER	No
153.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
155.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		07 CL	G2		No
156.1	1	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		23 STO	-		No
157.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		23 STO	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
159.1	EXIST. (1)	EXIST. (HM)	P6	NG	WD1	STN1	No	3'-0"	7'-10"	EXIST.		06 CL	G2	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
161.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
162.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
163.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
164.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
165.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
166.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
167.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		02 RR-M	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
167.1.1	1	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H1/13		51 UTJ-CUS	-	NEW DOOR FRAME, SLAB & HARDWARE COMPONENTS IN EXISTING OPENING	Yes
168.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		02 RR-M	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
170.1	SF-IN09	ALUM1	ANOD1	AL1	ALUM1	ANOD1	No	3'-0"	7'-10"	H5/15		07 CL	G2	STOREFRONT	No
173.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
174.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
175.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
176.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
177.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
178.1	3	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H4/14		06 CL	G2		No
179.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		02 RR-M	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
179.1.1	1	HM	P6	F	WD1	STN1	No	3'-0"	7'-10"	H1/13		51 UTJ-CUS	-	NEW DOOR FRAME, SLAB & HARDWARE COMPONENTS IN EXISTING OPENING	Yes
180.1	EXIST. (1)	EXIST. (HM)	P6	F	WD1	STN1	No	3'-0"	7'-10"	EXIST.		02 RR-M	-	RETROFIT FRAME AND REPLACE DOOR SLAB & HARDWARE COMPONENTS	No
182.1	SF-IN09	ALUM1	ANOD1	AL1	ALUM1	ANOD1	No	2'-11"	7'-10"	H5/15		07 CL	G2	STOREFRONT	No

LEGEND - GLAZING

- G1 1" INSULATED CLEAR TEMPERED GLAZING
- G2 1/4" CLEAR LAMINATED ACOUSTICAL GLAZING
- G3 1" LAMINATED SPANDREL GLAZING

GENERAL NOTES - OPENINGS

- ALL EXTERIOR DOORS, RECEIVE WEATHER SEALS.
- ALL EXTERIOR MAN DOOR FRAMES SHALL BE INSULATED.
- ALL EXTERIOR HOLLOW METALS TO BE GALVANIZED.
- SEE SPECIFICATION 08 7100 FOR DOOR HARDWARE SETS.

STOREFRONT SCHEDULE

WINDOW NUMBER	WINDOW TYPE	FRAME MATERIAL	FRAME FINISH	DETAILS	GLAZING	COMMENTS	ALTERNATE PRICING
126.1A	SF-E03A	ALUM2	ANOD2	EXIST.	G1/G3	DOOR 126.1.1	Yes
126.1	SF-IN05	EX. (HM)	P6	EXIST.	G2	REPLACE GLAZING IN EXISTING HM STOREFRONT SYSTEM, FRAME TO REMAIN AND BE PAINTED	Yes
128.1A	SF-IN08	EX. (HM)	P6	EXIST.	G2	REPLACE GLAZING IN EXISTING HM STOREFRONT SYSTEM, FRAME TO REMAIN AND BE PAINTED	Yes
128.1B	SF-IN07	EX. (HM)	P6	EXIST.	G2	REPLACE GLAZING IN EXISTING HM STOREFRONT SYSTEM, FRAME TO REMAIN AND BE PAINTED	Yes
128.1C	SF-IN06	EX. (HM)	P6	EXIST.	G2	REPLACE GLAZING IN EXISTING HM STOREFRONT SYSTEM, FRAME TO REMAIN AND BE PAINTED	Yes
129.A	SF-E01	ALUM2	ANOD2	H5/15	G1/G3		No
131.A	SF-E02	ALUM2	ANOD2	H5/15	G1/G3		No
150.A	SF-IN09	ALUM1	ANOD1	H5/15	G2		No
150.B	SF-IN08	ALUM1	ANOD1	H5/15	G2		No
150.C	SF-IN10	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
150.D	SF-IN11	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
150.E	SF-IN10	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
150.F	SF-IN10	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
150.G	SF-IN11	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
150.H	SF-IN10	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
151.A	SF-E01	ALUM2	ANOD2	H5/15	G1/G3		No
152.1A	SF-E03	ALUM2	ANOD2	H5/15	G1/G3	DOOR 152.1.1	No
153.A	SF-E04	ALUM2	ANOD2	H5/15	G1/G3		No
155.A	SF-E04	ALUM2	ANOD2	H5/15	G1/G3		No
155.B	SF-E04	ALUM2	ANOD2	H5/15	G1/G3		No
159.A	SF-E04	ALUM2	ANOD2	H5/15	G1/G3		No
170.A	SF-IN12	ALUM1	ANOD1	H5/15	G2		No
170.B	SF-IN08	ALUM1	ANOD1	H5/15	G2	DOOR 170.1	No
170.C	SF-IN10	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
170.D	SF-IN11	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
170.E	SF-IN10	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
170.F	SF-IN10	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
170.G	SF-IN11	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
170.H	SF-IN10	ALUM1	ANOD1	H5/15	G2	CLERESTORY WINDOW	No
182.A	SF-IN09	ALUM1	ANOD1	H5/15	G2		No
182.B	SF-IN08	ALUM1	ANOD1	H5/15	G2	DOOR 182.1	No

